


computing today

No 4

February
79

THE NEW MAGAZINE
FOR SMALL SYSTEMS
WITH BIG IDEAS

EXIDY
SHOOTING GALLERY

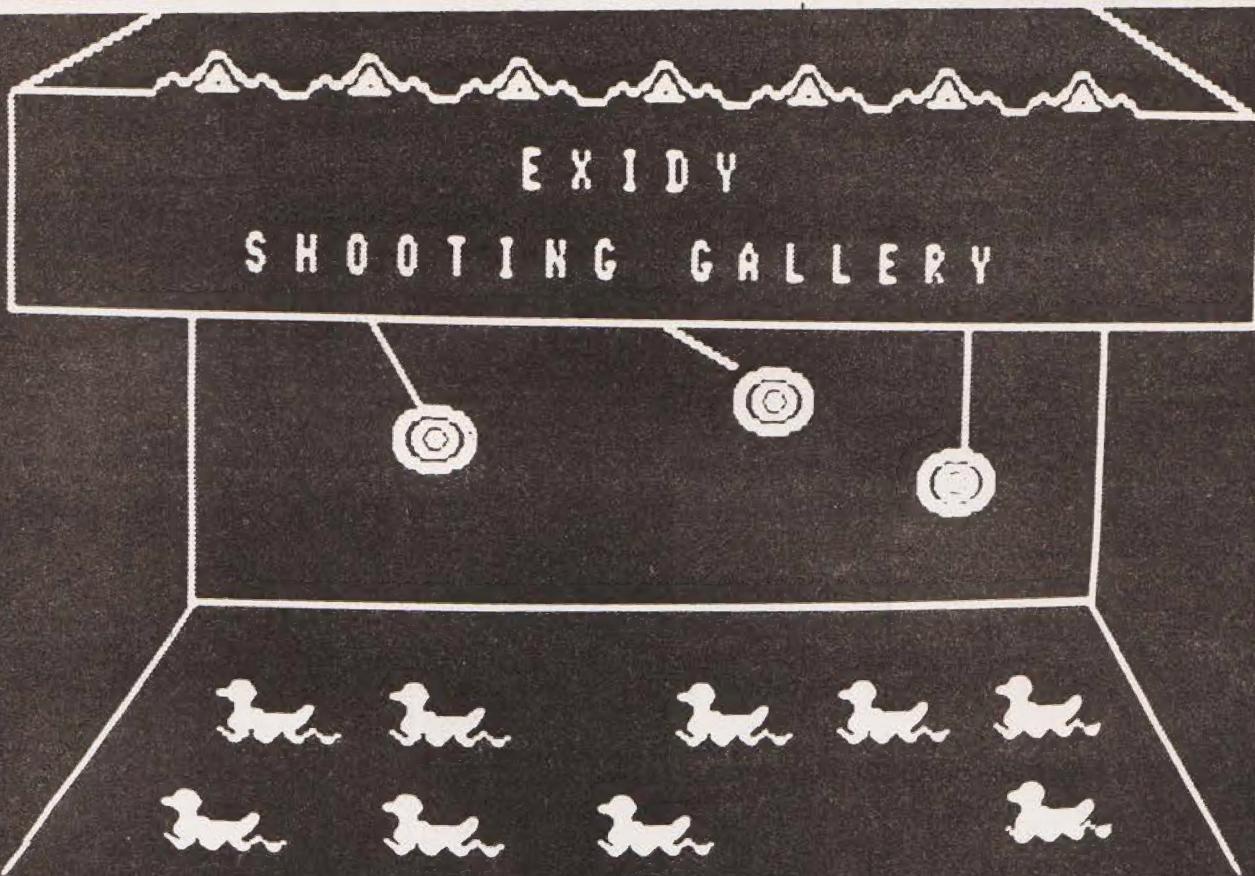

**Bally Video Game and
Exidy Sorcerer Reviewed
Program Development
for MPU Users Softspot**

Presented as a supplement to ETI.

computing today

No. 4 February 1979

News	2 Bits And Pieces
Sorcerer Reviewed	6 Its Magic
Program Development	13 Writing For MPUs
Artificial Intelligence	17 MPU IQ
Book Service	26 I/O IC
Data Sheet	30 Read Only Floppies
Bally Arcade Reviewed	31 Game Or Computer?
Softspot	39 Graphic Examples

EDITORIAL ADVERTISING PRODUCTION

Editor Gary Evans
Production Pete Howells
Technical Illustrator Paul Edwards
Advertising Mark Strathern, David
Sinfield, Joy Cheshire

See page 25 for important news about Computing Today

AD INDEX

AIRAMCO	47
ALMARC	48
BETOS LTD	44
COMP, COMP, COMP	42
HAPPY MEMORIES	2
HENRY'S	45
H.L. AUDIO	5
KIMBERLEY BUS RECORDS	47
LOTUS SOUND	2 & 3
LP ENTERPRISES	46
MICRODIGITAL	28 & 29
MUSICPRINT COMP. PRODUCTS	43
NASCOM	37, 41, 43, 45 & 47
NEWBEAR	16
RACE ELECTRONICS	25
STRATHAND	11
TANGERINE	11
TARGET	48
TECH. BOOK SERVICE	43
TRANSAM	6
WARD-JAMES	48

HAPPY MEMORIES



ASCII KEYBOARDS £49

£1 p&p. Cursor Kit £2.50

All 128 ASCII characters, parallel output, 2 key rollover, Alpha lock, Auto-repeat. Two user-definable keys, positive and neg. strobe. All on 12½ x 6 inch PCB. Add-on five key cursor kit for up, down, left, right and home available. Send SAE for data sheet.

Science of Cambridge Mk. 14
Set of 18 Texas low-profile DIL sockets £2.80
21L02450ns 89p, 16 up 86p, 64 up 83p
21L02 250 ns 110p, 16 up 107p, 64 up 104p
2114 450 ns 550p, 4 up 525p
2114 300 ns 625p, 4 up 600p
4116 DRAM 1050p, 4 up 1000p
2708 450 ns 675p, 4 up 650p

Texas low-profile DIL sockets
Pins 8 14 16 18 20 22 24 28 40
Pence 10 11 12 17 18 20 22 28 38
Antex 1mm bits for CX17 or CCN irons 45p

Happy Memories, 5 Cranbury Terrace
Southampton, Hants SO2 0LH

All prices include VAT. Add 20p postage except where shown. COD available at cost.

PET CORNER

Lotus now carry an exciting range of products for your CBM PET.

Memory Expansion

- ★ Mounts inside PET
- ★ Runs from PET's own power supply
- ★ Takes 10 minutes to fit
- ★ Includes memory test program
- ★ 6 month warranty

16k £276 + VAT

24k £337 + VAT

32k £394 + VAT

DUAL DRIVE MINIFLOPPY

- ★ Dual minifloppy with 100K per disk side — 200K online.
- ★ DISKMON in ROM on controller board, plugs into Expansion.
- ★ DISKMON automatically reorganizes free space after SAVE or ERASE.
- ★ Full disc software support.
- ★ FORTRAN & PLM compilers in February.
- ★ 90-day warranty on hardware.
- ★ Initial quantities limited.
- ★ Available early January.
- ★ Phone or write for full details.
- ★ Needs minimum 16K Expansion memory.

DKH641 Dual Minifloppy System

£916.00 plus 8% VAT

MUSIC BOX

Turns your PET into a programmable musical instrument. You can record and play up to 90 pages, 16 notes per page, change tempo, key, etc.

£37.50 inc. VAT & P&P

T.I.S. WORKBOOKS

A set of 5 workbooks to give you a full understanding of all the ins and outs of your PET more fully than any previous manuals.

£15.95 per set. inc. P&P

Dustcover £17.95 inc. VAT & P&P

Lots of software and other goodies.

Send large SAE.

OTUS

Tel: 01-981 3993
Telex: 261426
Attn. Lotus Sound

The Age of Affordable Personal Computing Has Finally Arrived

Ohio Scientifics


Superboard II

Full 8K basic and 4K user RAM

Built and tested

£263.84

+ 8% VAT

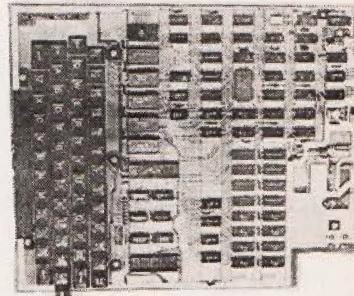

Ohio Scientific has made a major breakthrough in small computer technology which dramatically reduces the cost of personal computers. By use of custom LSI micro circuits, we have managed to put a complete ultra high performance computer and all necessary interfaces, including the keyboard and power supply, on a single printed circuit board. This new computer actually has more features and higher performance than some home or personal computers that are selling today for up to \$2000. It is more powerful than computer systems which cost over \$20,000 in the early 1970's.

This new machine can entertain your whole family with spectacular video games and cartoons, made possible by its ultra high resolution graphics and fast BASIC. It can help you with your personal finances and budget planning, made possible by its decimal arithmetic ability and cassette data storage capabilities. It can assist you in school or industry as an ultra powerful scientific calculator, made possible by its advanced scientific math functions and built-in "immediate" mode which allows complex problem

solving without programming! This computer can actually entertain your children while it educates them in topics ranging from naming the President of the United States to tutoring trigonometry all possible by its fast extended BASIC graphics and data storage ability.

The machine can be economically expanded to assist in your business, remotely control your home, communicate with other computers and perform many of the other tasks via the broadest lines of expansion accessories in the microcomputer industry.

This machine is super easy to use because it communicates naturally in BASIC, an English-like programming language. So you can easily instruct it or program it to do whatever you want, *but you don't have to*. You don't because it comes with a complete software library on cassette including programmes for each application stated above. Ohio Scientific also offers you hundreds of inexpensive programs on ready-to-run cassettes. Program it yourself or just enjoy it, the choice is yours.

Standard Features

- Uses the ultra powerful 6502 microprocessor
- 8K Microsoft BASIC-in-ROM
- Full feature BASIC runs faster than currently available personal computers and all 8080-based business computers.
- 4K static RAM on board expandable to 8K
- Full 53-key keyboard with upper-lower case and user programmability
- Kansas City standard audio cassette interface for high reliability
- Full machine code monitor and I/O utilities in ROM
- Direct access video display has 1K of dedicated memory (besides 4K user memory), features upper case, lower case, graphics and gaming characters for an effective screen resolution of up to 256 by 256 points. Normal TV's with overscan display about 24 rows of 24 characters, without overscan up to 30 x 30 characters.

Extras

- Available expander board features 24K static RAM (additional mini-floppy interface, port adapter for printer and modem and OSI 48 line expansion interface).
- Assembler/editor and extended machine code monitor available.

Fully built and tested. Requires only +5V at 3 amps and a videomonitor or TV and RF converter to be up and running.

There is enormous interest in Superboard, so order early if you wish to avoid inevitably long delivery dates later this year.

FREE 15-DAY TRIAL

Lotus Sound have had so many enquiries with questions about various aspects of Superboard II that in order to save time and ensure your satisfaction we are offering to return the full price to anyone who returns their machine, in good order, within 15 days of delivery.

SOUND

4 MORGAN ST., LONDON E3 5AB

(Phone for appointment)

COMPUTING TODAY — FEBRUARY 1979

Commands

CONT Statements	LIST	NEW	NULL	RUN	
CLEAR	DATA	DEF	DIM	END	
GOTO	GOSUB	IF...GOTO	IF...THEN	INPUT	FOR
NEXT	ON...GOTO	ON...GOSUB	POKE	PRINT	LET
REM	RESTORE	RETURN	STOP	READ	

Expressions

Operators

-, +, *, /, ↑, NOT, AND, OR, >, <, <>, >=, <=, =
RANGE 10⁻³² to 10³²

Functions

ABS(X)	ATN(X)	COS(X)	EXP(X)	FRE(X)	INT(X)
LOG(X)	PEEK(I)	POS(I)	RND(X)	SGN(X)	SIN(X)
SPC(I)	SQR(X)	TAB(I)	TAN(X)	USR(I)	

String Functions

ASC(X\$)	CHR\$(I)	FRE(X\$)	LEFT\$(X\$, I)	LEN(X\$)	MID\$(X\$, I, J)
			STR\$(X)		VAL(X\$)

Plus variables, arrays and good editing facilities.

To: LOTUS SOUND
4 MORGAN ST., LONDON E3 5AB

Please send me Ohio Scientific Superboard
Computer(s)
I enclose cheque/PO for £

Name

Address

News

Hot Printer

The low cost, about £175, thermal printer from Bowmat joins the ranks of the low cost peripherals designed for small systems.

The TP-3150-2 features a single chip MPU to control print operation, resulting in a versatile device that can accept data in parallel or serial form with print direction and character rotation controllable by tying control pins to an appropriate level.

The printer produces the standard ASCII character subset as well as recognising line feed, carriage return and back space control characters. An integral 32 character buffer to speed parallel loading rounds off an impressive specification.

The mechanisms does not include a power supply, but for the low asking price you can't have everything.



Petsoft Programs

Petsoft, PO Box 9, Newbury, Berks, are producing an ever expanding range of software for the popular PET microcomputer. Their latest list of additions to their range include titles ranging from a program for solving linear programming problems (constrained maximization) using the simplex method to a package that draws a maze on the PETs screen from which the user must escape.

All existing titles have been

reduced in price by 8% and an SAE to Petsoft should secure you their catalogue which should make an interesting read.

Petsoft are also offering, for £10.75, a battery-powered head demagnetizer packed inside a cassette shell. This gets over the problems of residual magnetization of the cassette deck's heads without endangering the safety of any program cassettes in the vicinity of PET when the device is used.

Elf 'Ere

H. L. Audio Ltd of 9B Garman Road, London, N17 0UR, are now offering the ELF 11 MPU Development Kit to the UK market. The system, very popular in the States, offers a hex keypad, LED display plus support components to implement a minimal RCA 1802 MPU test bed. An interesting feature is the ability of the ELF to generate alphanumeric or graphics characters on a TV screen in even its basic form.

PET Pieces

WITH thousands of PETs in the field the business of providing expansion boards for the basic machine looks an attractive proposition and many people are providing a range of interesting add ons for the beast. These range from the frivolous, PET music box, to the more meaty memory expansion boards and floppy drives.

Commodore themselves carry information on the increasing range of products in their excellent Users Club letter. Another company with a news sheet detailing PET goodies is Lotus Sound of 4 Morgan Street, London, E3 5AB.

Lotus sell the above mentioned music box that allows one to compose up to 90 pages of music, a page being 16 notes. Some attractive sounding noises can be produced with this little box that, when used with PET, allows quite comprehensive editing and formatting of the musical material.

The device also allows sound effects to be added to existing programs.

On a more serious note (sic) Lotus supply expansion memory boards in 16K, 24K and 32K increments.

The mother board fits inside the PET and runs off the unregulated DC supply of the machine. As the 32K Expandapet (what else could it be called) uses less power than 4K of standard PET memory, overloading of the PET's PSU is not a worry.

There are four slots for daughter boards on the main Expandapet board into which can be plugged EPROM boards (2 x 2780 + 2 parallel I/O parts), S100 I/O driver boards, and experimenters' boards (a blank card providing an area for the development of custom circuits).

The mother board will also take the connections to the DKH641 dual floppy drive unit.

This comes complete with cabinet and mains power supply — connect to Expandapet and you're up and running.

The unit features two 5½in single sided disks providing about 100K of storage on each.


It will support the Centronic as well as PET printers and offers the commands shown below:

Oh — the price — £916 plus VAT.

For more details of the above write to Lotus enclosing an SAE.

- DIR Display contents of disk directory
- FORMAT Formats a blank diskette
- MEM Display memory
- SAVE Save program on disk
- LOAD Load program from disk
- ERASE Erase file from disk
- GO Run machine language program
- NEW Reset machine language program pointers
- PRNT Commercial printer support
- ODISK Open disk DATA file
- CDISK Close disk DATA file
- RDISK Read disk DATA file
- WDISK Write disk DATA file
- XEQ load and run program overlay

This Is The Famous

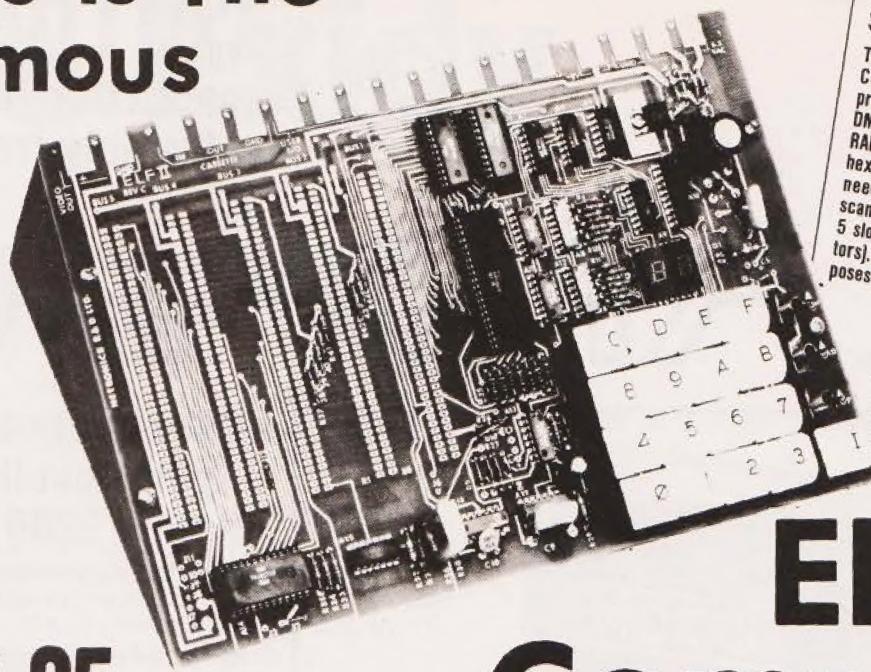

£99.95

PLUS 8% V.A.T.

Stop reading about computers and get your hands on one! with ELF 11 and our new Short Course by Tom Pittman, you can master computers in no time at all! ELF 11 demonstrates all 91 commands an RCA 1802 can execute and the Short Course quickly teaches you how to use each of the 1802's capabilities.

ELF 11's video output lets you display an alphanumeric readout or graphics on any T.V. screen or video monitor and enjoy the latest T.V. games.

But that's not all... once you've mastered computer fundamentals ELF 11 can give you POWER with add-ons that are among the most advanced found anywhere. American IEEE chapters plus hundreds of universities and major corporations have chosen the ELF 11 to introduce their students and personnel to microprocessor computing!

Learn The Skill That May Soon Be Far

More Important Than Your College Degree!

The ability to use a computer may soon be more important to your earning power than college degree. Without a knowledge of computers you are always at the mercy of others when it comes to solving highly complex business, engineering, industrial and scientific problems. People who understand computers can command MONEY and to get in on the action, you must learn computers. Otherwise you will be left behind.

ELF 11 is the F-A-S-T Way to Learn

Computer Fundamentals!

Regardless of how minimal your computer background is now, you can learn to programme a computer in almost no time at all. That's because Netronics has developed a special Short Course on Microprocessor And Computer Programming in non-technical language that leads you through every one of the RCA COSMAC 1802's capabilities so you'll understand everything ELF 11 can do... and how to get ELF 11 to do it!

All 91 commands that an 1802 can execute are explained to you, step-by-step. The text, written for Netronics by Tom Pittman, is a tremendous advance over every other programming book in print.

Keyed specifically to the ELF 11, it's loaded with "hands on" illustrations. When you're finished, ELF 11 and the 1802 will no longer hold any mysteries for you.

In fact, not only will you be able to use a personal computer creatively, you'll also be able to understand computing articles in the technical press.

If you work with large computers, ELF 11 and our Short Course will help you to understand what makes them tick.

A DYNAMITE PACKAGE FOR JUST £99.95 plus 8% VAT!

With ELF 11, you learn to use machine language — the fundamental language of all computers. Higher level languages such as FORTRAN and BASIC must be translated into machine language before a computer can understand them. With ELF 11 you build a solid foundation in computers so you really know what you're doing, no matter how complicated things get.

Video output also makes ELF 11 unique among computers selling for such a low price. Attached to your T.V. set, ELF 11 becomes a fabulous home entertainments centre. It's capable of providing endless hours of fun for both adults and children of all ages! ELF 11 can create graphics, alphanumeric displays and fantastic video games.

Only a low cost R.F. Modulator is required to connect ELF 11 to your T.V.'s aerial socket! (To order one see coupon below.)

H.L. Audio, 138 Kingsland Road, London E2 8BY

ELF 11 Computer

SPECIFICATIONS

The £99.95 ELF 11 computer features an RCA COSMAC COS/MOS 1802 8-bit microprocessor addressable to 64k bytes with DMA, interrupt, 16 registers, ALU, 256 byte RAM expandable to 64K bytes, professional hex keyboard fully decoded so there's no need to waste memory with keyboard scanning circuits, built-in power regulator, 5 slot plug-in expansion bus (less connectors), stable crystal clock for timing purposes and a double-sided, plated-through PCB plus RCA 1861 video IC to display any segment of memory on a video monitor or TV screen along with all the logic and support circuitry you need to learn every one of the RCA 1802's capabilities.

ELF 11's 5-card expansion bus (connectors not included) allows you to expand ELF 11 as your need for power grows. If you're an engineer or hobbyist you can also use ELF 11 as a counter, alarm, lock, thermostat, timer or for countless other applications.

ELF 11 EXPLODES INTO A GIANT!

Thanks to ongoing work by RCA and Netronics, ELF 11 add-ons are among the most advanced anywhere. Plug in the GIANT BOARD and you can record and play back programmes, edit and debug programmes, communicate with remote devices and make things happen in the outside world. Add Kluge Board to get ELF 11 to solve special problems such as operating a more complex alarm system or controlling a printing press. Add 4K RAM Board and you can run longer programmes, store more information and solve more sophisticated problems.

Expanded, ELF 11 is perfect for engineering, business, industrial, scientific and personal finance and Tax applications. No other small computer anywhere near ELF 11's low price is backed by such extensive research and development programmes.

The ELF-Bug Monitor is an extremely recent breakthrough that lets you debug programmes with lightning speed because the key to debugging is to know what's inside the registers of the microprocessor and, instead of single stepping through your programme, the ELF-Bug monitor, utilising break points, lets you display the entire contents of the registers on your T.V. screen at any point in your programme. You find out immediately what's going on and can make any necessary changes. Programming is further simplified by displaying 24 Bytes of RAM with full address, blinking cursor, and auto scrolling. A must for serious programmers! Netronics will soon be introducing the ELF 11 colour graphics and music system — more breakthroughs that ELF 11 owners will be the first to enjoy!

NOW BASIC MAKES PROGRAMMING ELF 11 EVEN EASIER!

Like all computers, ELF 11 understands only "machine language" — the language computers use to talk to each other. But, to make life easier for you we have developed an ELF 11 Tiny BASIC. It talks to ELF 11 in machine language for you, so you can programme ELF 11 with simple words that can be typed out on a keyboard such as PRINT and LOAD.

"ASK NOT WHAT YOUR COMPUTER CAN DO... BUT WHAT IT CAN DO FOR YOU"

Don't be trapped into buying a dinosaur simply because you can afford it and it's big. ELF 11 is more fun than "big name" computers that cost a lot more money.

With ELF 11 you learn to write and run your own programmes. You're never reduced to being a mere key punch operator working blindly with someone else's predeveloped software.

No matter what your speciality is, owning a computer which you really know how to use is sure to make you a leader. ELF 11 is the fastest way there is to get into computers. Order from the coupon below!

SEND TODAY

H.L. AUDIO LTD., DEPT. E.T.I.

138 KINGSLAND ROAD

LONDON E2 8BY

(TEL. 01-739 1582)

SOLE EUROPEAN DISTRIBUTORS FOR NETRONICS

R&D LTD. U.S.A.

YES I want to run programmes at home and have enclosed £109.56 including postage and V.A.T. for RCA COSMAC ELF 11 kit £5.94 including postage and V.A.T. for power supply (required). £5.95 including postage and V.A.T. for RCA 1802 Users Manual £5.95 including postage and V.A.T. for "Short Course On Microprocessor and Computer Programming".

I want mine wired and tested with power supply. RCA 1802 Users Manual and Short Course included for just £184.10 including postage and V.A.T. I am also enclosing payment (including postage and V.A.T.) for the items checked at the left. Total enclosed

USE YOUR ACCESS BARCLAYCARD

Interbank

Account No.

Signature

CREDIT CARD PHONE ORDERS ACCEPTED. 01-739 1582

PRINT

Name

Address

Exp date

NOW AVAILABLE FOR ELF 11

- Tom Pittman's Short Course on Microprocessor & Computer Programming teaches you just about everything there is to know about ELF 11 or any RCA 1802 computer. Written in non-technical language, it's a learning breakthrough for engineers and laymen alike. £5.00 post paid!
- Deluxe metal cabinet with plexiglass dust cover for ELF 11. £29.95* plus £1.50 p&p. R.F. modulator for use with T.V. set £3.00* post paid.
- GIANT BOARD kit with cassette I/O, RS 232-C/TTY I/O, 8-bit P/I/O, decoders for 14 separate I/O instructions and a system monitor/editor. £39.95 plus £1.00 p&p.
- KLUGE (prototype) BOARD accepts up to 36 ICs £17.00 plus 50p p&p.
- 4K static RAM kit. Addressable to any 4K page to 64K. £89.95 plus £1.56 p&p.
- Gold plated 86-pin connectors (one required for each plug-in board) £5.70* post paid.
- Professional ASCII Keyboard kit with 128 ASCII upper/lower case set, 96 printable characters, onboard regulator, parity, logic selection and choice of 4 handshaking signals to mate with almost any computer. £64.95* post paid.
- Deluxe metal cabinet for ASCII Keyboard £19.95* plus £1.50 p&p.
- ELF 11 Tiny BASIC on cassette tape. Commands include SAVE, LOAD, X, Y, Z, +, -, ., 26 variables A-Z, LET, IF..THEN, INPUT, PRINT, GO TO, GO SUB, RETURN, END, REM, CLEAR, LIST, RUN, PLOT, PEER, POKE. Comes fully documented and includes alphanumeric generator required to display alphanumeric characters directly on your T.V. screen without additional hardware. Also plays tick-tack-toe plus a drawing game that uses ELF 11's hex keyboard as a joystick. 4K memory required £14.95* post paid.
- Tom Pittman's Short Course on Tiny BASIC for ELF 11 £5.00* post paid.
- Expansion Power Supply (required when adding 4K RAM) £19.95*.
- ELF BUG TM Deluxe System Monitor on cassette tape. Allows displaying the contents of all registers on your T.V. at any point in your programme. Also displays 24 bytes of memory with full addresses, blinking cursor and auto scrolling. A must for the serious programmer! £14.95* postpaid.
- COMING SOON: A-D, D-A converter, Light Pen, Controller Board, Colour Graphics & Music System and more!

*Plus VAT at 8% on price and postage

CALL OR WRITE FOR WIRED PRICES

DEALER ENQUIRIES INVITED

The exciting new
TRITON
 Personal Computer
 exclusively from:

TRANSAM



Complete kit of
 parts available
 only £286 (+ VAT)

Basic in Rom: a powerful 2k Tiny basic resident on board, makes Triton unique, easy to use and versatile.

Graphics: 64 Graphic characters as well as full alpha numerics.

Single Board: Holds up to 8k of memory, 4k RAM and 4k ROM, supplied with 3k ROM and 2k RAM.

Memory Mapping: 2 mode VDU, I/O or memory mapped for animated graphics.

Cassette Interface: crystal controlled Modem tape I/O with auto start/stop + "named" file search.

UHF TV Interface: On board uhf modulator, plugs into TV aerial socket.

Comes Complete with KEYBOARD, CASE, POWER SUPPLY, THRO-HOLE PLATED QUALITY P.C.B. FULL DOCUMENTATION POWERFUL 1K MONITOR & 2k TINY BASIC PLUS ALL COMPONENTS INCL. IC SOCKETS. NOTE TV SET & CASSETTE NOT INCLUDED.

Expansion: Fully buffered for up to 65k of memory on expansion busbar.

Building a better computer wasn't easy—but we did it.

TRANSAM

I am interested in the Triton

Name _____

Address (please print) _____

To: TRANSAM COMPONENTS LTD.
 12 CHAPEL STREET, NW1

Please send me the following

1. A copy of your latest catalogue
 I enclose 30p + S.A.E. 9 X 7
2. A copy of the Triton Manual
 I enclose £5 + 70p P & P.
3. A complete kit of parts for
 Triton Computer. £286 + VAT
 + £4 P & P
4. A Printed Circuit Board
 £50 + VAT & £1 P & P

ETI 9



TOTAL ENCLOSED £

Cheque, Money Order, etc.



BARCLAYCARD, ACCESS,
 VISA & MASTER CHARGE
 ARE WELCOME. SEND
 YOUR CARD NUMBER WITH
 ORDER.

All components can be bought
 separately and eleven packs can be
 purchased on an easy-to-buy scheme.
 See catalogue.

The P.C.B. alone is £50 + VAT plus £1
 for packing and postage.

VAT rate is 8% on all kit
 components.

TRANSAM

TRANSAM COMPONENTS LTD.
 12 CHAPEL STREET
 LONDON, NW1 TEL: 402 8137

NEXT TO EDGWARE ROAD TUBE STATION, MET. LINE.
 TRITON COMPUTER IS THE TRADE MARK OF
 TRANSAM COMPONENTS LTD.

The Exidy Sorcerer

Phil Cohen reviews the Exidy Sorcerer — is it another PET or is it something more?

THE SORCERER is a Z-80 based multi-language system. It comes as a moulded plastic case containing CPU, RAM, monitor, keyboard and modems for TV and tape recorder. The price is somewhere around £850. A socket on the side of the case allows the insertion of 8k of ROM in a cartridge form.


First Impressions — Case and Keyboard

The Sorcerer is a nice machine. The keyboard is a pleasure to use — very chunky and with a separate numeric keypad. The top of the case is printed with a diagram of the keyboard so that the user can write the positions of his user-defined graphics (more about that later).

The ROM cartridge looks very much like an 8-track

tape cartridge — except that it has an edge-connector at the business end. The sockets at the back, as well as TV and tape inputs and outputs, include an RS232 interface (for teletype or similar) and a parallel interface with handshaking. The whole thing can just about be carried under one arm (although at £850-odd a time, I wouldn't recommend it), and it looks very smart indeed. The video output (which can easily be turned into UHF for a few pounds) produces a rock-steady picture giving 30 lines by 64 characters. The character set includes upper and lower case alphanumerics and a full graphics set including clubs, diamonds, hearts and spades! There are three shift keys:

SHIFT produces the upper case alphabet;
GRAPHIC produces the full graphics set and

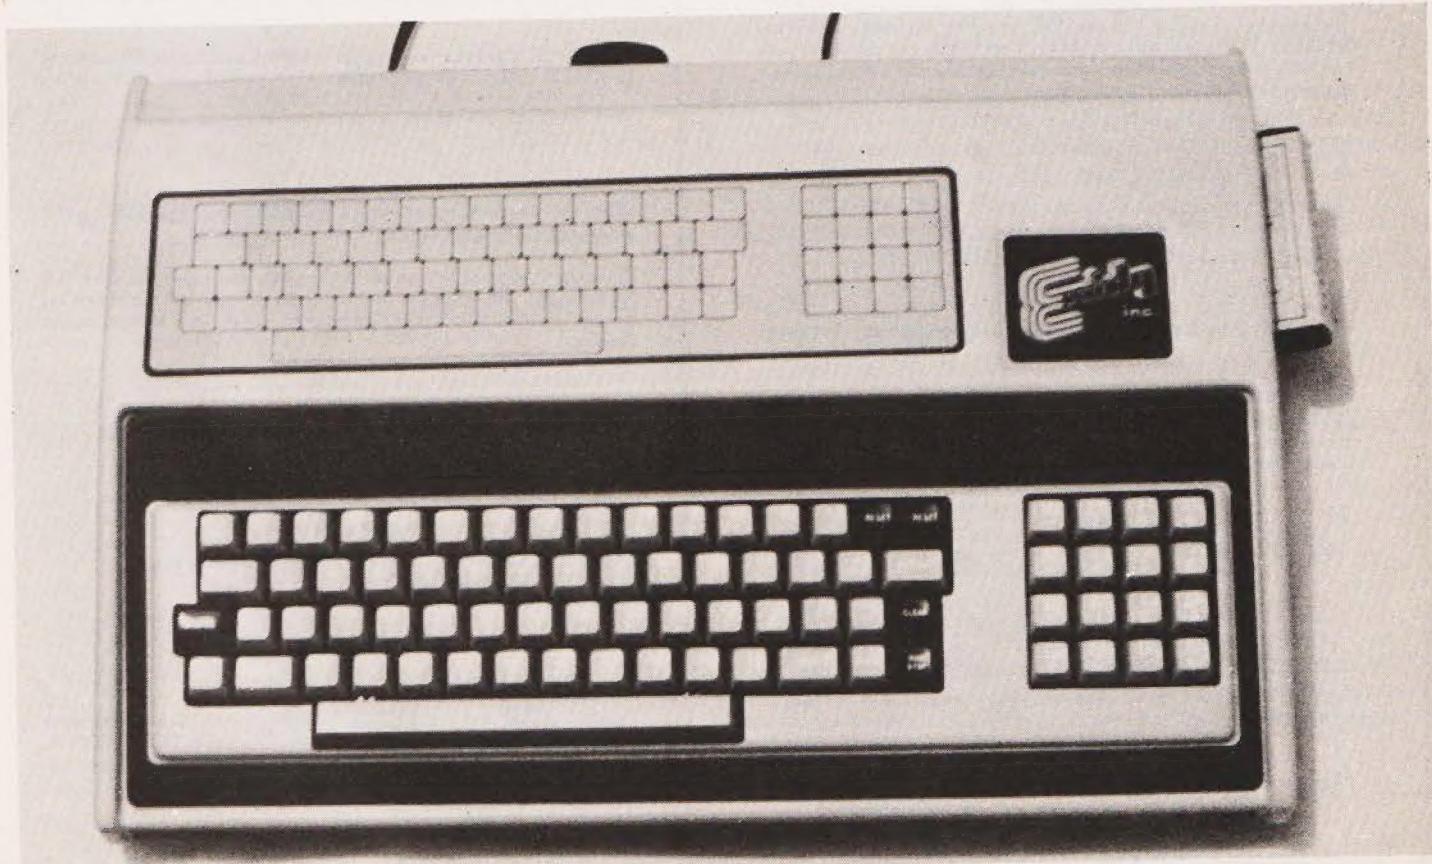

CONTROL produces ASCII control characters such as form feed, carriage return and bell. Pressing SHIFT and GRAPHIC together gives the user-defined character set stored in RAM. This can be altered from BASIC or machine code to give a set of 64 8 x 8 dot matrix characters. I don't know off-hand what the number of letters in the Greek alphabet is, but I'm sure it's less than 64! It is also possible to re-define the graphics characters in the same way, giving 128 possibilities.

There are two RESET keys—as a safety feature. Only pressing both at once has any effect. It's little tricks like that that make a machine a pleasure to use and cuts down the amount of profanity in the early stages! There's also a REPEAT key. Normally, a REPEAT key has to be pressed while pressing the character to be repeated. This one's different. When pressed, it repeats the last character to be input; this saves the trouble of pressing SHIFT, GRAPHIC, a letter and REPEAT all at the same time — a feat which is doubtless easy for internationally acclaimed pianists, but which I find a trifle difficult.

See how easy programming is? Just think of all the applications for this great machine.

Using the Sorcerer is as easy as typing. Try typing the LIST command and you will see your program displayed on the screen.

You must understand the keyboard if you are to have any meaningful conversations with Sorcerer.

The keyboard is similar to a standard typewriter keyboard, with a few additions. The letters and control keys are virtually in the same positions, but for your convenience and speed in numerical computations, a numeric pad is provided (see Figure 3).

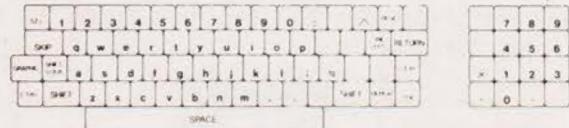


Figure 3. The Keyboard (Characters without Shifting)

Since your Sorcerer has both upper and lower case characters, you will find its operation identical to a typewriter. And, since many programs are written only in upper case characters, there is a shift lock key for your convenience.

If you press a key without shifting, you will get a lower case character.




Figure 4. Characters with Shift Lock Key Depressed

22

Back to BASICS

The BASIC comes in 8k of ROM — this may not seem like all that much, but it's Z-80 CODE, remember!

With the BASIC ROM cartridge plugged in, pressing RESET will give the impressive message:

31976 BYTES FREE.

This is the amount of space available for storing programs, variables or whatever. This is enough for a floating-point array with just under 7 000 elements!

The version of BASIC is similar to that found in the Commodore PET — not surprising since both BASICS were designed by the same software company. The Sorcerer uses standard BASIC line-replacement editing with a colon separating statements on the same line. One thing I found out early on, though, is that the Sorcerer does not like long lines. On occasion I have managed to 'crash' the system completely, requiring reset to get any response. This can be achieved by INPUTting a string longer than one line. When writing a line of a program, the Sorcerer will accept up to two lines of

When you simultaneously press the SHIFT LOCK key and a letter, you get the upper case representation or notation as shown in Figure 4.



Figure 5. Characters with Shift Lock and Graphics Keys Depressed

When you simultaneously press the SHIFT LOCK key, GRAPHIC key, and letter you get the graphic symbol shown in Figure 5.

The graphic symbols shown on the key tops are a special defined set for Sorcerer. They are used to draw pictures, lines and bar charts on the screen. They can be used just like any other letter or digit on the keyboard.




Figure 6. Characters with Shift Graphic Key Depressed

Pressing SHIFT and the GRAPHIC key simultaneously with any letter will give you one of your own characters. (See the SPECIAL OFFERING chapter for detailed instructions on how to program your own character set.)

23

text but will ignore the second line! Although this seems like a major bug, it should be borne in mind that the Sorcerer's lines are 64 characters long and so most programs will not cause any problems.

The system commands are: (Square brackets indicate an optional parameter)

BYE	Hands control over to the monitor.
CLEAR [n]	Clears variable stack. n is the number of bytes available for string storage after CLEAR.
CLOAD name [n]	Loads a program from unit n. (default is cassette) Name is the file name (up to 5 chars). The BAUD rate is software-selectable at 1200 or 300 BAUD (see monitor description).
CLOAD* n name	Loads a numeric array called name from device n. This can be done during a program — very useful for data storage but why not string arrays as well?




Figure 7. Characters with Control Key Depressed

Figure 7 shows how you can perform the standard TTY and computer terminal functions, by pressing the **CTRL** key simultaneously with the designated keys. These functions correspond to ASCII characters 0 through 31. If you are new to personal computing, you can ignore these completely.

Figure 7 also shows which keys control the video monitor cursor. With the **CTRL** key depressed, either of the **HOME** keys will put the cursor in home position (upper left corner of the screen), while an arrow key will move the cursor 1 space in the direction of the arrow.

It's about time to give this newly discovered keyboard a workout and there's no better way than by exploring BASIC.

CONT

CSAVE
name [n]
CSAVE* n name
LIST [n]

NEW
NULL n

RUN [n]

Continues execution at the point it was broken in at (BREAK is achieved by pressing CONTROL and C simultaneously)

The opposite of CLOAD and CLOAD*.

Lists the program either from the start or from line number n. Surprisingly, there's no way to tell it to stop at a specified line, although the listing can be held at its current position by pressing RUN/STOP. This halts the processor until it is released.

Deletes current program.

When using some peripherals, it is necessary to output a number of NULL characters after each carriage return (to give the carriage time to return!) This sets the number.

Runs at start of program or at line n.

Most of these can be incorporated in a program (putting RUN at the start of a program is not recommended!)

Variables

The variable types are: floating point, string and array. There are no integer variables! Presumably, with 32k of memory to play with, the designers decided that most users wouldn't need the saving possible by using integers rather than floating-point numbers for large arrays. The arrays can be of up to 12 dimensions (in theory, there's no limit — but with a floating point array with each dimension's subscript range equal to 2, 12 dimensions gives 4096 elements).

The string variables can hold up to 255 elements each and the floating point range is 6 significant figures with a range of 1.70141E38 to 2.93874E-39. The six significant figure limit does not, however, apply to arithmetic:

```

10 A=111111111111
20 B=100000000000
30 PRINT A
40 A=A-B
50 B=B/10
60 GOTO 30
RUN
1.11111 E + 11
1.11111 E + 10
1.11112 E + 09
1.11121 E + 08
etc.

```

The results of the above run show that the actual arithmetic accuracy is 7 significant digits. The fact that the 'noise' digit is a 2 rather than a zero leads me to suspect that the storage is in a binary representation of some sort, rather than BCD.

Statements

The Sorcerer supports normal BASIC statements: DATA, DEF, DIM, END, FOR NEXT, GOTO,

GOSUB, IF . . . GOTO, IF . . . THEN, IF . . . GOSUB, INPUT, LET (optional), ON . . . GOTO, ON . . . GOSUB, PRINT, READ, REM, RETURN, STOP.
In addition to these it supports:


PEEK	Allowing memory to be examined.
POKE	Allowing memory to be changed.
RESTORE	This starts READ at the first DATA statement again, allowing data to be read more than once.
WAIT	Stops execution until a particular bit pattern appears at a specified port — very useful for interfacing with miscellaneous mechanical hardware: limit switches and the like.
OUT, INP	These allow communication via the ports. Double-byte numbers can be sent or received.

Functions

The intrinsic BASIC functions are:
ABS, ASC, ATN (arctan), CHR\$, COS, EXP, FRE (amount of memory left), INP, INT, LEFT\$, LEN (of a string), LOG (base e), MIDS, RND (random number-rectangular distribution), POS (cursor position), RIGHTS\$, SGN, SIN, SPC (prints spaces), SQR, STR\$, TAB, TAN, USR (user-defined machine code subroutine with one parameter), VAL. The accuracy of these was limited by the 6-digit accuracy of the machine:

PRINT $30 \uparrow 2$ (30^2)
900.001
PRINT $2 \uparrow 13$ (2^{13})
8192.01

The above represent the two worst errors I could find in about 15 mins, however, the computational accuracy in general was adequate.

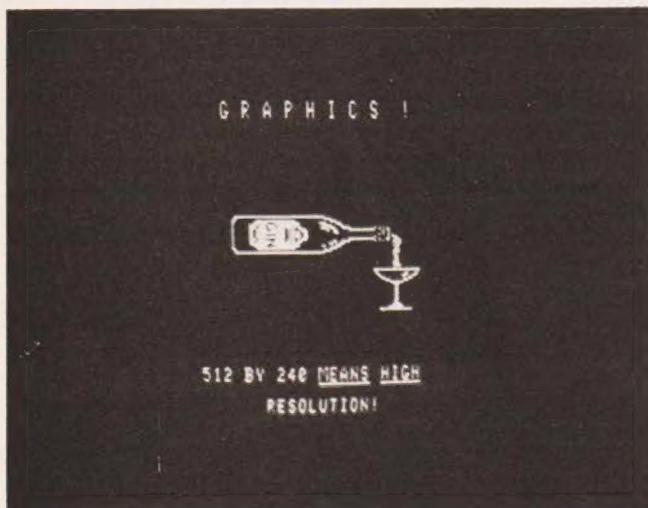

Above and right: Examples of the Sorcerer's impressive graphics capability.

Error Messages and Software Fragility

The error messages are a little cryptic:



?UL ERROR
or SN ERROR IN 20

for example, but they are fully explained in the manual. Anyway, which would you rather have — massive error messages or more functions?

Apart from long lines, the system seems quite stable — I 'crashed' it on only two occasions, one by entering too long a line on INPUTting a string and once by trying to get back into BASIC from the monitor while the ROM was removed! On both occasions, pressing the general reset got me out of trouble.

User-Defined Graphics

These can be changed by POKEing from BASIC or from the monitor. Each character requires eight two-byte numbers to define it and these are put into RAM between FEOO and FFFF, depending on which

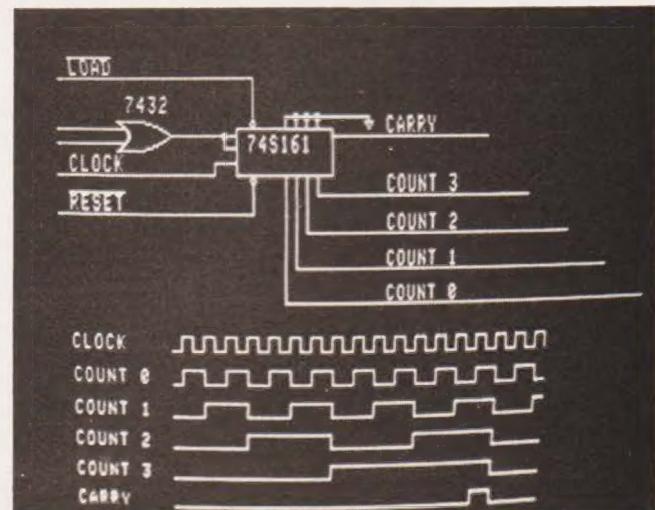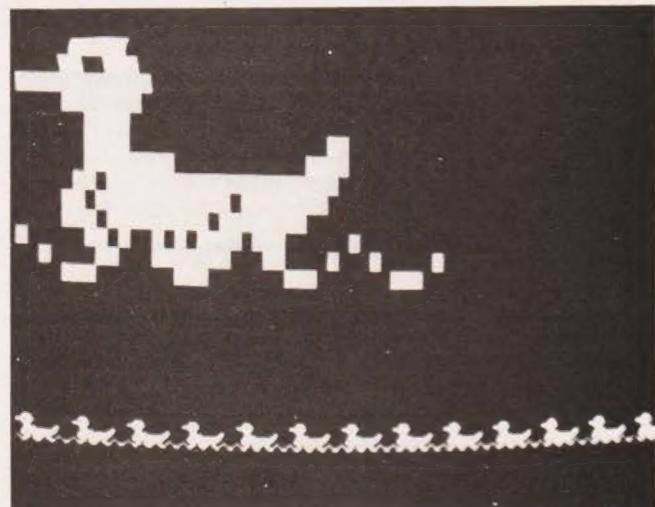

character is to be set. For example, to define the shifted graphic character associated with the "I" key (which happens to reside at the bottom of the user graphics RAM) as the Greek letter Omega (Ω), the memory locations FEO0 to FEO7 are set to 00, 38, 44, 82, 82, 44, 22 and EE respectively. The bit-patterns of these, when laid out one under the other in sequence, form an Ω (try it, if you don't believe me!). Whenever shifted graphic "I" is used after this has been done, the letter Omega will appear.

The graphics held in RAM can, of course, be stored on tape — so you can have a tape for Greek maths, wargames, or whatever. (By the way, try 3C 7E DB E7 FF 42 7E 3C!)

Monitor

The monitor is 4K (and 4K of Z-80 code is quite a lot!).

The commands are: (Parameters in square brackets are optional)

DUMP n [m]	Displays memory contents from n to m — nice output format.
ENTER n	Allows successive memory locations to be changed, starting with location n.
SAVE name n m [unit]	Saves memory onto tape with from n to m and sends output to the specified unit. The output header will contain the name, begin address, block size, file type and GO address.
LOAD [name] [unit] [n]	Loads file from specified unit. The start address will be the one in the tape header if n is not specified.
FILES [n]	Lists information in headers coming from unit n.
GO n	Calls a program starting at n.
MOVE n1 n2 [S]n3	This mirrors the Z-80 move instruction. It can either (depending on whether S is included) move information from n1 through n2 to locations beginning at n3, or move n3 locations starting at n1 to locations starting at n2.
TEST n m [C]	Used to test RAM locations from n to m — inclusion of C makes it repeat continuously. This must be very useful for fault-finding in newly-completed units.
PROMPT =n	Changes the monitor prompt to character n. Can't see the use for this myself!
CREAT	Causes the creation of a 'BATCH' tape. This is a macro of monitor commands on a tape which can be played back and executed a number of times. This must be to enable full RAM and ROM testing automatically at the factory — other uses would include multi-pass compiler overlay and other exotic applications.

LIST	Lists the BATCH commands from a tape as it is played back.
BATCH OVER	Executes commands from a tape. Returns control to the user from BATCH mode. This command would be the last on a BATCH tape.
SET S=n	Sets the delay between each letter output to the display. Used when output is to a slow printer. n=0 means that the tape modem operates at 1200 baud; n=1 means 300 baud.
SET T=n	Sets file type in tape header store. This is a two-byte number with which the user can label a file in any way he chooses.
SET F=n	Sets file type in tape header.
SET X=n	Changes output port to video, parallel output, Centronics printer driver, tape or address specified
SET O=V	GO address in tape header.
O=P	Changes output port to video, parallel output, Centronics printer driver, tape or address specified
O=L	Changes output port to video, parallel output, Centronics printer driver, tape or address specified
O=S	Changes output port to video, parallel output, Centronics printer driver, tape or address specified
O=n	Changes output port to video, parallel output, Centronics printer driver, tape or address specified
SET I=K	Sets input port to keyboard, parallel port, tape or specified address
I=P	I=S
I=n	PP
	Jumps to plug-in ROM.

A very powerful selection altogether. Exidy hope to bring out a full assembler/editor which, in addition to the above, would make this an excellent development system.

Modem

The baud rate of the modem is software — programmable at 1200 or 300 baud. I subjected it to the acid test — my little portable cassette recorder with auto level control!

I had to hand some tapes which had been recorded at 1200 baud on a good machine — these played without a hitch. However, when I tried to record a program at 1200 baud, the Sorcerer couldn't read it back — due, probably, to the fact that on small cassette recorders the playback circuitry is better than the record side, due to the availability of pre-recorded tapes.

Anyway, when I tried the same thing at 300 baud it worked perfectly (although slower!).

I couldn't get the machine to accept wrong characters without noticing — I tried various tricks like re-recording file headers, fiddling with the plug on the signal cable and even varying the playback speed mechanically — all of these either:

- a) had no effect, or
- b) produced an error message.

One rather annoying response, however, was that after aborting an attempt to load a BASIC program, typing LIST caused the same line number (and nothing else!) to be repeated ad infinitum until stopped by interrupt.

The facility for recording arrays of data and replaying them with a single command is nice, if

Sorcerer

marred by the fact that (as far as I can tell) it cannot be done with string arrays.

Manuals

The two manuals which are provided (one on the BASIC system and one on the system as a whole) are beautifully produced, although they contained the usual Americanisms which jarred occasionally ("In California the sales tax is 6%. This program will calculate your sales tax on any purchase...").

One annoying thing was that these were both learning texts — there's no quick-reference hard information manual. The manuals also leave a few things out — the `USR()` function (which allows entry to a user-defined machine code subroutine) is mentioned, but not how to tell the machine the start address.

The glossary in one of the manuals is worth quoting:

"PRINTER — a computer output mechanism that delivers hard copy data". Come back, NASA, all is forgiven!

All in all, though, the manuals are very easy to follow and should provide an excellent 'bootstrap' for the beginner, as well as explaining the subtler parts fairly painlessly.

Accessories

At present, the Sorcerer is available with BASIC only. Exidy hope to bring out other ROM packs including a word processor, an assembler/editor and an APL

system. The re-definable graphics will prove useful in the latter, no doubt, as APL uses all manner of little squares, circles, dots, arrows and what-have-you.

An S-100 extension will also be available soon from Exidy and this will enable the machine to be expanded ad infinitum.

Summary

The Sorcerer is an excellent machine. What makes it different from the other units on the market is that it is designed for the amateur to use, but has full professional facilities. It would be quite happy linked to a mainframe — it even has the full ASCII control character set.

The BASIC is comprehensive and fast and the memory is massive. The best thing about it, though, is its flexibility. Anything which can be made user-accessible is made so. For instance, it is possible re-define, from BASIC, what size the string storage area is to be. It's this sort of user-transparency makes it so flexible.

The price is not high in comparison to other machines (it's cheaper than a PET with memory expansion).

If you want a machine for a sensible application (process control, invoicing or whatever), then this is a good buy.

The Sorcerer we reviewed was on loan to us from Teleplay (at 14 Station Road, New Barnet, Herts, EN5 1QW).

TANGERINE

COMPUTER SYSTEMS LIMITED



DON'T FORGET
SPECIAL OFFER
£10 discount
Due to the
large amount of
interest shown
Offer Extended
to Mar. 12. '79

The new low cost VDU - Tangerine 1648
(See page 16, ETI, Oct. '78 for feature details)

ORDERING INFORMATION

The normal **KIT** price is £139.86, which includes postage, packing and insurance and VAT @ 8%. HOWEVER, as an introductory gesture we are **discounting this price by £10**, for all orders received postmarked **BEFORE 12th December, 1978**.

If you require further information, send an A4 sized self-addressed envelope. If you wish to purchase a kit please send a cheque or money order made payable to

TANGERINE COMPUTER SYSTEMS LIMITED

RIVERMILL LODGE, LONDON ROAD, ST. IVES,
CAMBS. PE17 4BR
Tel. St. Ives (0480) 65666

IN SCOTLAND
IN SCOTLAND

NASCOM 1

Z80 Microcomputer kit

Undoubtedly the finest value for money kit available anywhere. Fully socketed.

INTERFACE FOR:


TV (UHF)
TV Monitor
Cassette
Teletype
32k Ram expansion board

May be seen working
9 a.m. - 5 p.m. Mon.-Fri.

Callers welcome

Price £197.50 + VAT (8%)

Callers welcome



STRATHAND
44 ST. ANDREW'S SQ.
GLASGOW G1 5PL
041-552 6731

Tel. order welcome with Access and Barclaycard

Callers welcome



Program Development

Ron Wilson takes a look at operating systems using MIKBUG as an example.

AT PRESENT there are two approaches to becoming a microcomputer owner:

1. The integrated circuits MPU, ROMS, RAMS, PIA etc are purchased and the user designs his own microcomputer for his application. This method takes advantage of the special circumstances of each application.

2. A complete system is bought which has been designed, and if necessary built and tested. The complete system is of course capable of expansion by the addition of peripherals, extra memory and special purpose interface circuits.

The low component — cost is attractive in case 1 but consider this: WHEN POWER IS FIRST APPLIED WHAT HAPPENS? In both cases some type of **operating system** is needed.

An operating system is a complex program which operates and supervises the running and execution of the computer and other programs within the computer. In case 1 above the user is left to organise his own system and consequently needs to write some type of operating system to govern the system. In case 2 an operating system is usually provided by the manufacturer and for microprocessor systems comes in the form of a pre-programmed ROM.

As an example the features of a system provided by Motorola known as MIKBUG will be considered.

Mikbug

This is a loader and diagnostic control program that is supplied with certain of Motorola's complete systems. This program is contained in a pre-programmed ROM.

The various routines within MIKBUG may be called by entering on the keyboard one of the following single character calls:

L—Load Data into memory
P—Print/Punch Data from Memory
M—Memory Change
R—Display Contents of the CPU Registers
G—Go to Main Programmes

Other features include the capability to set breakpoints with memory change and the use of interrupts.

When power is first applied to a system governed by a MIKBUG operating system an asterisk (*) is displayed on the user's VDU in response to the user pressing the microcomputer RESET button.

The asterisk is very reassuring. Often whilst testing a program under development the system appears to 'die'. The faithful RESET brings it back to life with an asterisk.

The Rôle of Editors and Assemblers in Programming

The importance of the operating system has been considered earlier, however, other software packages are available to shorten the user's design and development cycle. The major packages are

A Source Program Editor and
An Assembler

In developing a program the sequence of events tends to be:

Problem Definition
Obtain Method of Solving Problem
Draw Flowcharts
Write Assembly Language Program
Edit Assembly Language Program
Assemble Mnemonics into Object Code
Run the Program
Correct Errors
Obtain a Record of the Validated Program

The bold sections show where the editor and assembler packages are used. Each computer system has its own editor which helps the user to format his source statements for suitable input to the assembler. The source program written mnemonics needs to be translated into numeric patterns. The resulting data, called object code, is generated from the source code by using an assembler. The input is the source program and the output is an assembly listing and object tape file. This file is normally in the form of a paper tape or cassette tape.

The Use of an Assembler

The manual translation of mnemonics into hexadecimal code is tedious and prone to error. This is particularly the case when calculating the addresses

for the Branch type of instruction. The normal method of programming uses an assembler software package as an aid in order to overcome these difficulties. The method of writing programs needs to be modified slightly to account for the special operation of the assembler program.

The format of the source program is very important. Some sample programs may help to illustrate the essential features.

A Sample Program

```
NAM 6800RW1
OPT S, O
*2'S COMPLEMT PROGRAM
ORG O
LDAA #01H LOAD ACC A WITH O1 IN HEX
COMA FORM 1'S COMPLEMENT
INCA INC ACC A
SWI
END
```

A number of features are noticeable when the program is contrasted with writing directly in hexadecimal.

1. Certain prefixes and suffixes adjoin the program, eg NAM, OPT.
2. Comments have been added.
3. In fact there are separate fields within a program line.
4. A software interrupt SWI has been used. This is to help in testing the program.

The separate fields within a source statement are LABEL, OPERATOR, OPERAND and COMMENT. The use of labels at the destinations of branch and jump instructions simplifies programs by eliminating the tedious calculations otherwise needed. The mnemonic operator is present in all statements, except when the statement is a comment only, however, the inclusion of an operand field depends upon which mnemonic operator is used. Comments are optional but they are a convenient way of producing a well-documented program.

The successive fields within a statement are separated by one or more SPACE characters.

The Sample Program Assembled

The assembler package when activated responds as shown below. The user then types 1P or 2P to indicate first pass or second pass of the source tape. The procedure in more detail is:

M6800 ASSEMBLER VERSION 1.2
ENTER PAS : 1P, 1S, 2P, 2L, 2T

1P
M6800 ASSEMBLER VERSION 1.2
ENTER PASS : 1P, 1S, 2P, 2L, 2T

2P

PAGE	001	6800	RW1
00001		NAM	6800RW1
00002		OPT	S,O
00003	*2's	COMPLEMT PRO-	GRAM

```
00004 0000 ORG O LOAD ACC A
00005 0000 LDA A WITH 01 IN
00006 0002 43 COM A HEX
00007 0003 4C INC A FORM 1'S
00008 0004 3F SWI COMPLEMENT
00009 END INC ACC A
```

TOTAL ERRORS 00000

After the first pass the source tape must again be set so that the beginning of the tape is in a position to be read.

During the second pass through the program, a listing is printed which shows the address in the program counter, and the object code, along with the corresponding source statement (unless the listing is suppressed by the "NOLIST" option under assembler directive "OPT" in the source program). Within the listing the errors are noted on the line preceding the source statement, by one or more of the codes.

Output is again shown to be highly structured.

```
NAM 6800RW2
OPT S,O
*PROGRAMMABLE COUNTER
ORG 100
LDAA #0AH LOAD ACC A WITH TEN
```

```
LDAB #OOH INITIALISE ACC B=0
BACK INCB INCREMENT B
CBA COMPARE ACC'S
BNE BACK BRANCH IF ACC A NOT = ACC B
SWI
END
```

This program contains a BRANCH instruction, BNE. A label BACK is used to define where to branch to. The assembled program is as follows:

*G
M6800 ASSEMBLER VERSION 1.2
ENTER PASS : 1P, 1S, 2P, 2L, 2T

1P
M6800 ASSEMBLER VERSION 1.2
ENTER PASS : 1P, 1S, 2P, 2L, 2T

2P

PAGE	001	6800RW2		
00001		NAM	6800RW2	
00002		OPT	S,O	
00003		* PROGRAMMABLE COUNTER		
00004	0064	ORG	100	
00005	0064	LDAA	A #0AH	LOAD ACC A
00007	0066	C6 OOH	LDAB	WITH TEN
00008	0068	5C BACK	INC	B INITIALISE
00009	0069	0069	11	ACC B=0
CAB				INCREMENT B
00010	0064	25 FC	BNE	COMPARE
00011	006C	SWI	BACK	ACC's
00012			END	BRANCH IF
BACK	0068			ACC A NOT=ACC B

TOTAL ERRORS 00000

In order to understand the listing consider the line
00008 0068 5C BACK INCB INCREMENT B
00008 is the line number
0068 is the instruction address (Program Counter)
5C is the instruction (and operand) field

Program Development

BACK is the label field
INC B is the operator or mnemonic field
INCREMENT B is the comments field

An asterisk (*) in the first character position of a statement causes the entire statement to become a comment.

As an example — *PROGRAMMABLE COUNTER.

The aim is to use the assembler to obtain a tape of the object code for the program under consideration.

The object tape for the second specimen program has the following characters on it.

S00B000036383030525732202B
S10C0064860AC6005C1126FC3F6B
S903000FC

An advantage of using the assembler program is that knowledge of the exact hexadecimal codes for the program are not necessary. The next main concern is to run and test the program.

Running a Program

The object tape is loaded into the system. In this case the operating system is under the control of MIKBUG so after the computer systems has been reset then L is typed. This reads in the object tape via the teletype.

Before the G command is given the beginning address of the user's program must be loaded into the program counter from the stack address A048 (MS byte) and A049 (LS byte). This is a feature of MIKBUG. This is achieved using the memory change feature M.

The first sample program was run as shown below:

*L
*M A048

A048 00 00

A049 6C 00

A04A 9C

*G D9 OA FF FCFC 0004 A042

The main features of MIKBUG are used in running this program. The bold sections indicate the user input, whereas any digit not underlined was printed as MPU response. In this way A048 and A049 were set to 00 00 as defined by the ORG statement. The G caused the program to run until SW1 was executed. The print out following G results from SW1 and can be interpreted as condition codes (D9), B accumulator (OA), A accumulator (FF), index register (FCFC), program counter (0004) and stack pointer (A042).

The program loaded the A accumulator with 00000001 then complemented this to give 11111110 which was then incremented. The result 11111111, or FF in hexadecimal, is the two's complement of the original number loaded into A.

Thus the operation of the program can be verified, in this case, by noting the contents of accumulator A, shown in the print out, following the G command.

The interrelation between the operating system, the editor and the assembler software has been introduced. Finally the reader is invited to consider the second sample program run shown below:

*L
*M A048
*A048 00 00
*A049 04 64
*A04A 9C
*G D4 OA OA FCFC 006C A042

Did this program run correctly?

HEXADECIMAL

CONVERSION

8		7		6		5		4		3		2		1	
Hex	Decimal	Hex	Decimal	Hex	Decimal	Hex	Decimal	Hex	Decimal	Hex	Decimal	Hex	Decimal	Hex	Decimal
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	268,435,456	1	16,777,216	1	1,048,576	1	65,536	1	4,096	1	256	1	16	1	1
2	536,870,912	2	33,554,432	2	2,097,152	2	131,072	2	8,192	2	512	2	32	2	2
3	805,306,368	3	50,331,648	3	3,145,728	3	196,608	3	12,288	3	768	3	48	3	3
4	1,073,741,824	4	67,108,864	4	4,194,304	4	262,144	4	16,384	4	1,024	4	64	4	4
5	1,342,177,280	5	83,886,080	5	5,242,880	5	327,680	5	20,480	5	1,280	5	80	5	5
6	1,610,612,736	6	100,663,296	6	6,291,456	6	393,216	6	24,576	6	1,536	6	96	6	6
7	1,879,048,192	7	117,440,512	7	7,340,032	7	458,752	7	28,672	7	1,792	7	112	7	7
8	2,147,483,648	8	134,217,728	8	8,388,608	8	524,288	8	32,768	8	2,048	8	128	8	8
9	2,415,919,104	9	150,994,944	9	9,437,184	9	589,824	9	36,864	9	2,304	9	144	9	9
A	2,684,354,560	A	167,777,160	A	10,485,760	A	655,360	A	40,960	A	2,560	A	160	A	10
B	2,952,790,016	B	184,549,376	B	11,534,336	B	720,896	B	45,056	B	2,816	B	176	B	11
C	3,221,225,472	C	201,326,592	C	12,582,912	C	786,432	C	49,152	C	3,072	C	192	C	12
D	3,489,660,928	D	218,103,808	D	13,631,488	D	851,968	D	53,248	D	3,328	D	208	D	13
E	3,758,096,384	E	234,881,024	E	14,680,064	E	917,504	E	57,344	E	3,584	E	224	E	14
F	4,026,531,840	F	251,658,240	F	15,728,640	F	983,040	F	61,440	F	3,840	F	240	F	15
	8		7		6		5		4		3		2		1

HEXADECIMAL TO DECIMAL

- Locate column of decimal numbers corresponding to left-most digit or letter of hexadecimal select from this column and record number that corresponds to position of hexadecimal digit or letter.
- Repeat step 1 for next (second from left) position.
- Repeat step 1 for units (third from left) position.
- Add numbers selected from table to form decimal number.

DECIMAL TO HEXADECIMAL

- (A) select from table highest decimal number that is equal to or less than number to be converted.
- (B) Record hexadecimal of column containing selected number.
- (C) Subtract selected decimal from number to be converted.
- Using remainder from step 1 (C) repeat all of step 1 to develop second position of hexadecimal (and remainder).
- Using remainder from step 2 repeat all of step 1 to develop units position of hexadecimal.
- Combine terms to form hexadecimal number.



★ SYM-1 ★

(Formerly VIM-1)

The new 6502 micro from Synertek. Fully assembled and tested

Ex Stock @ **£199.00**

+ 8% V.A.T.

Carriage £1.00

NORTH STAR HORIZON

★ 5 1/4" floppy disc.

★ Low cost.

★ S100 Compatible new line.

★ Extended BASIC.

Assembled and tested

£1,265 + 8% VAT

Kit **£995** + 8% VAT

★ NASCOM 1 ★

Z80 BASED MICROCOMPUTER KIT

Ex Stock @ **£197.50**

+ 8% VAT

£1.00. Carriage

SEND FOR THIS MONTH'S SPECIAL OFFER LIST

Z80 CPU 2.5 MHz	2708	£7.50
£13.99	2716	£22.50
Z80 P10 PS	MIKBUG	£13.65
£9.15	4116	£15.00
Z80 CTC PC		£9.15
Z80A CPU 4MHz	SFF 96364	£20.00
£20.00		£16.20
Z80A P10	MC 1488P	£11.05
Z80A CTC	MC 1489P	£11.05
MC 6800	75150P	£8.75
MC 6820	75150N	£4.63
MC 6850	75154	£6.74
MC 6810	4N33	£3.61
MC 8602P	AY-5-1013	£2.88
MC14536P	6402	£3.69
MC 3459	6571	£2.53
SC/MP II	2501	£10.30
6502		£14.93
8080A		£8.00
Buffers		
Memories	81LS95	£1.30
2102-1	81LS96	£1.30
2102L-1	81LS97	£1.30
2112	81LS98	£3.04
2513	82T26	£6.50
SWATBUG	8T95	£1.60
	8T97	£16.00
2114	74367	£1.60
		£8.25

24-HOUR TURNROUND ON ORDERS

Please add 8% VAT to all prices. P&P 30p unless otherwise stated. Barclaycard and Access welcome. Overseas orders issued with Pro-Forma Invoice. Send for catalogue to Newbear Computing Store, Bone Lane, Newbury, Berks. Callers welcome Mon.-Sat. 9.00-5.30, but please phone us first on 0635 49223. New office - 2 Gatley Road, Cheadle, Cheshire. (Callers only). Telephone 061-491 0134.

SEND FOR OUR NEW CATALOGUE

COMPUTER DESIGNS

77-68 6800 Microcomputer	£7.50	P&PP .50
WB-1 TTL Microcomputer	£6.50	.50

FROM ADAM OSBOURNE ASSOCIATES

Introduction to Microcomputers		
Volume 0 The Beginners Book	£5.95	.50
Volume 2. Basic Concepts	£5.95	.50
Volume 3 Some Real Products June 1977 Revision	£11.95	1.00
8080A/8085 Assembly Language Programming	£6.95	.50
6800 Assembly Language Programming	£6.95	.50
Some Common Basic Programmes	£5.95	.50
6800 Programming for Logic Design	£5.95	.50
8080 Programming for Logic Design	£5.95	.50
Payroll with Cost Accounting in Basic	£9.95	1.00
Instant Freeze-Dried Computer Programming in basic		
By Jerald R. Brown	£4.95	.75
My Computer Likes Me When I Speak in Basic	£1.65	.30
Computer Programs that Work	£2.40	.75
Basic Software Library	Volume 1 £17.50	.50
	Volume 2 £17.50	.50
	Volume 3 £26.95	.50
	Volume 4 £7.95	.50
	Volume 5 £7.95	.50
	Volume 6 T.B.A.	.50
	Volume 7 £26.95	.50

NEW BOOKS

First Book of Kim	£7.00	.50
Z80 Microcomputer Handbook	£7.25	.50
Using the 6800 Microprocessor	£6.25	.50
Micro 6502 Journal	£1.70	.50
Learning Basic Fast	£6.30	.50
How to Program Microcomputers	£6.30	.75
Getting involved with your Own Computer	£6.30	.75
8080A Bugbook	£4.75	.75
	£6.95	.75
SYBEX		
Microprocessors C201	£8.00	.50
Microprocessor Interfacing Techniques	£8.00	.50

BEAR BAGS

1. 77-68 CPU PCB and Components	£45.00
2. 77-68 LEDs and Switches	£14.95
3. 77-68 Power Supply	£17.95
4. 77-68 19" 5u Rack and Backplane	£26.70+
5. 77-68 4K Ram PCB and Components	£74.00
6. 77-68 Mon 1 PCB and Components	£50.00
7. 4K Ram Exorciser PCB and Components	£71.50
8. 8K Ram Exorciser PCB and Components	£160.00*
9. Petitevid VDU Kit	£85.00
10. Kansas City Cassette Interface	£18.95
11. UHF Modulator	£4.50
12. 77-68 VDU PCB and Components	£69.50
13. 77-68 Mon 2 PCB and Components	£t.b.a.
14. Prom Programmer PCB and Components	£35.00
15. PROMVERTER (Enables a 2708 to be used instead of MIKBUG)	£8.50

50p Postage and Packing unless otherwise stated + £1.50 Postage and Packing.

*£1.00 Postage and Packing.

FLOPPY DISC DRIVES

5 1/4" SHUGART SA400 DISC DRIVE	£255.00
Carriage by Securicor 'C' Rate	£4.50
8" DRI SINGLE SIDED DOUBLE DENSITY	£325.00
Carriage by Securicor 'C' Rate	£5.00
8" DRI DOUBLE SIDED DOUBLE DENSITY	£365.00
Carriage by Securicor 'C' Rate	£5.00


Artificial Intelligence

M. C. Fairhurst of the Computers & Cybernetics Group, University of Kent, gives an introduction to the principles of some very exciting research that's being done there which could lead to a better understanding of the human brain — or a better computer.

ARTIFICIAL INTELLIGENCE — by which we mean the imitation by artificial systems of characteristics which we describe as intelligent when observed in humans — is a field which has attracted an increasingly large amount of research effort in recent years. While nowadays artificial intelligence is generally acknowledged as an academic discipline in its own right, the term is often used interchangeably with other terms such as bionics, robotics, and so on with the result that the layman becomes confused and the purist indignant. Whatever its precise terms of reference, what is clear is that artificial intelligence embraces concepts and theories from many different disciplines including mathematics, cybernetics, computer science, psychology, biology and others. A recent series of articles (ETI May 1978) has given a very comprehensive introduction to some current ideas in robotics while a subsequent article (ETI July 1978) on Brains and Computers introduced readers to the structure of the human brain and therefore the processes and mechanisms which underlie every aspect of human behaviour. It is hoped that this article, in so far as it presents an alternative approach to problems in artificial intelligence, will bring together some basic ideas from each of the two preceding ones.

The most prevalent philosophy for the design of an artificially intelligent system (for example, to provide the "brain" of, say, an industrial robot) is that either a general-purpose digital computer is programmed in such a way as to accomplish the desired task, or that some special-purpose computing system is explicitly designed to achieve the same result. While such a computer program or electronic design does not necessarily preclude the possibility of future self-programming or adaptation of behaviour, the essence of this approach to the design of an intelligent machine is that the "intelligence" is somehow imposed by means of external intervention or manipulation.

This is by no means the only design philosophy which might be adhered to. An alternative approach becomes immediately attractive if it is recognised that certain types of system possess inherent, as opposed to externally-imposed, intelligent characteristics. The problem of constructing an intelligent

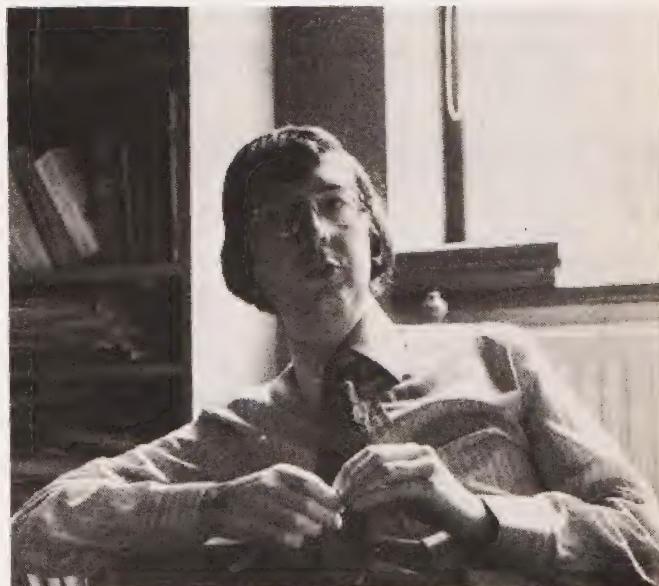

M. C. Fairhurst of the University of Kent, author of this article

machine or robot then becomes one of exploiting these existing characteristics in a meaningful way rather than one of creating them in the first instance. We shall investigate the implications of pursuing this second approach, and we begin by exploring the nature of inherent intelligence in more detail.

Intelligence From Chaos?

Let us look for an example of intelligent behaviour in what at first sight may seem to be an unlikely situation. Figure 1 shows a network made up of interconnected electronic cells, each of which receives and generates binary signals. The operation of a cell may be easily represented by a table such as that of Table 1, which lists all possible signal combinations at the input of the cell and the corresponding output signal in each case. Note that the variables $Q_0, Q_1, Q_2 \dots$ can each be either 0 or 1. The precise values given to these variables for any element define the function of that particular element.

Input 1	Output 2	Input 3	Output
0	0	0	Q_0
0	0	1	Q_1
0	1	0	Q_2
0	1	1	Q_3
1	0	0	Q_4
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
1	1	1	Q_5

Table 1: Association between possible sets of inputs and their corresponding outputs.

and determine exactly how the element will operate. For a cell with K inputs there are exactly 2^{2K} different functions which could be defined.

Readers familiar with the principles of digital circuit design will recognise that the electronic cells described are examples of logic gates, although here we assume that any function may exist and not only the more usually-encountered functions such as AND, OR, NAND etc. As an illustration, Table 2 shows a complete set of possible functions (f_0-f_{15}) for a cell with two inputs.

How may we usefully describe the behaviour of the overall network of cells? At any instant in time we list the output signal value of each cell in the network in order. This list, which will consist of each cell in the network in order, defines the state of the network. However, because the elements are interconnected the output of one element may cause the input to another element to change, while this in turn may

cause the output of the next cell in the chain to change, and so on. In other words, at successive instants in time the state of the network may change. After a sufficient length of time, of course, because there are a limited number of possible states which exist (000...00, 00...01, 000...10, ..., 111...11), a state or a group of states must repeat. We can summarise the network behaviour by drawing a 'State transition diagram' which shows the changes from one state to the next in the network at successive instants in time. Part of one such state diagram is shown in Figure 2. Note that in order to get a general picture of what is happening in the network it is not necessary to label each individual state at this stage. We can see that in this example the network has just three modes of activity which may be said to be stable — two of these stable modes correspond to the two cycles (repeating groups) of states of three and five states respectively in length. The third corresponds to the single stable state — the state which recurs once reached. It can be seen that all other states, after a sufficient length of time, are ultimately drawn in to one of these stable areas of activity.

The crucial question which we now wish to ask concerns the sort of state transition diagram which we might expect for any particular configuration of elements in the network. For example, suppose that we connect together in a totally random way a number of elements whose functions are selected completely at random from the set of all possible functions. How will this network behave?

Experimental Results

In general terms, our intuition leads us to believe that a system whose specification is random will give rise to disorganised, unstable, possible chaotic, and certainly unintelligent behaviour. For example, let us consider a parallel with the random network situation taken from everyday life. Suppose, for instance, that I arrange my filing cabinet in such a way that I allow some of Mr Jones' letters to be filed under 'S' and others under 'T', while Mr Brown's letters are put into a file marked 'Mr White' on odd days and a file marked 'Mr Green' on even days. Suppose that I further compound the disorganisation by putting all the P files in the A drawer, and so on. Surely I should not

Input 1	Input 2	Output																
			f_0	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
0	1	0	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	1

Table 2: All sixteen possible functions for a cell with two inputs

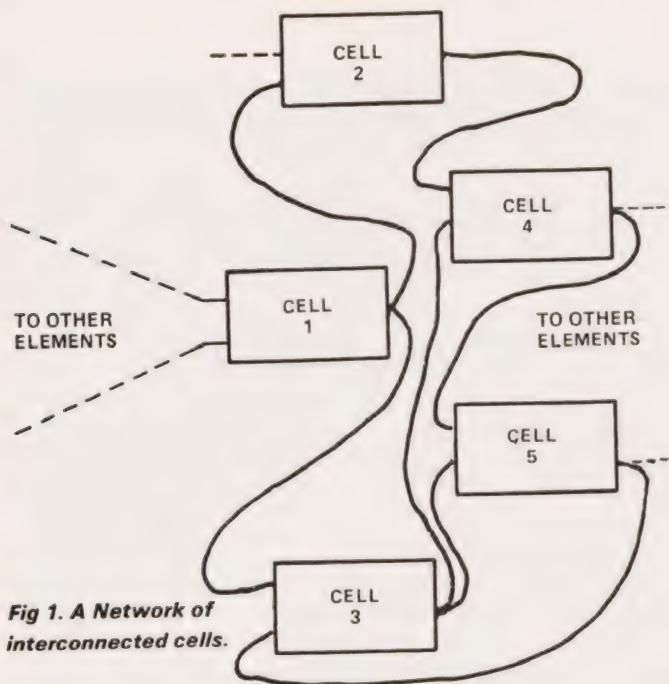


Fig 1. A Network of interconnected cells.

then expect my filing system to be even intelligible, let alone efficient!

To go back to the case of my random network of electronic cells, I should expect the randomness of the situation to give rise to unstable and unintelligible activity in the network, such random behaviour being characterised by the existence in the state diagram of many long strings of meaningless states and cycles containing a large number of states.

It is at this point that a surprising, but most interesting and highly significant observation can be made. In a large number of experiments on many different networks it has been found in practice that rather than the unstable chaos one might expect, a random network exhibits highly stable and ordered behaviour, represented by the existence of very few repeating cycles of states each cycle in itself comprising very few states. For example, a random network of 100 electronic cells – with the potential for existing in any one of 2100 states – was found typically to generate only about 10 cycles each consisting of no more than about 10 states. In other words, since after a sufficient length of time the network will be found to exist in one of only relatively few state cycles, we may say that the system has a restricted and manageable number of different modes of activity and is, therefore, stable. This inherent ability of the network to organise its behaviour into one of a well-defined number of modes of activity leads us to attribute to the network a pre-disposition for intelligent behaviour, in just the same way that we might feel inclined to attribute intelligence to our "chaotic" filing system if we opened a drawer to find out, despite our lack of coordination, all the files on "Mr Brown's interview" had ended up together in one place.

Three further points need to be made clear in the context of intelligence in networks of electronic processing cells. First, we may allow the network to interact with its environment by allowing some of the element input channels to be connected to the external world rather than to other cells. In this way the


network can be made to respond to some stimulus by following a trajectory of transitions to some state cycle. Second, if we arrange for the element functions to be variable – i.e. we allow them to change if some appropriate signal is received – then the state structure is itself variable, and the network can be made to learn and thus make meaningful associations between external events and its own possible modes of activity. Third, in a practical context – which is of major significance to many readers of this magazine – all the required properties of the electronic cells which are described above may be realised by utilising the commercially available, easily obtainable and very cheap random access memory device to implement the electronic cells which make up the network.

Although the idea will be pursued later it is worth pointing out at this stage that the overall structure of the electronic system as described is not unlike the structure of the brain. It has two extremely important features in this respect. First, the intelligence of the system is not localised in any specific area, but distributed over the entire network. As a result the system is much less susceptible to localised damage than more conventional electronic systems, in much the same way that our memory traces can often be retained despite severe disruption of the brain's activity. Second, the system processes its data in a parallel rather than serial mode, (all the cells operate simultaneously) with a consequent ability for high processing speeds.

Intelligence in Action

Let us suppose that we wish to construct a device which will automatically read and identify letters of the alphabet (clearly a task requiring intelligence, whether carried out by a man or a machine). A simple scheme for accomplishing this task is shown in Figure 3. A TV camera is used to sense the image which is then encoded (or "digitised") by means of suitable circuitry into a binary representation, and this coded

Fig 2. Part of a State Transition Diagram.

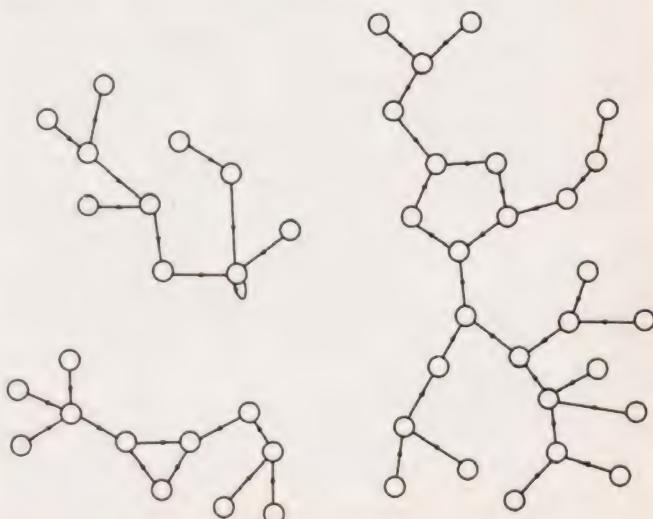

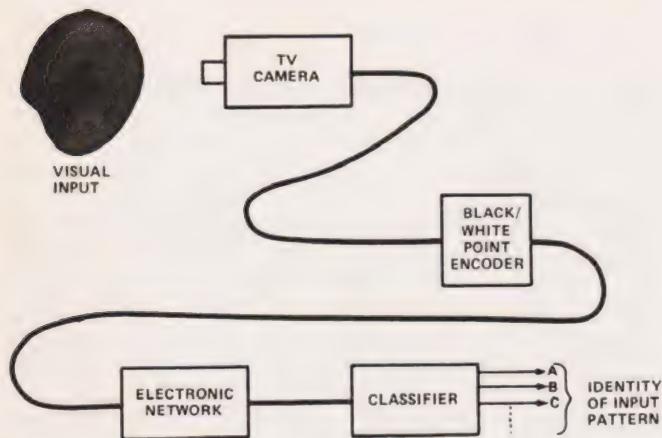


Fig 3. A simple method of recognizing visual patterns.

version of the input fed to a network of adaptive electronic cells as described.

We now exploit the natural intelligence of the network by modifying the element functions — in other words we "teach" the network — in such a way that it will respond to examples of a particular pattern class (e.g. the letter "A") by entering a particular state cycle, the equivalent of executing just one of its possible modes of activity. The classifier is then required to identify the cycle entered and hence signal the identity of the pattern which was received at the input.

It is easily seen that the system is making use of the natural stability of the network in so far as the number of states which need be identified is dramatically smaller than the total number of possible input patterns which may occur. It is exactly this property of the network which transforms the problem from one of identifying a potentially very large set of inputs to the much simpler problem of identifying one out of a much smaller number of possible cycles.

Intelligence and Models of the Brain

Of considerable interest in the context of the possible exploitation of the inherent intelligence of cellular electronic networks is the fact that the human brain is itself a cellular structure, whose processing units are biological computing cells called neurons (a description of the properties of neurons is given in "Brains and Computers", ETI July 1978). Although the computational mechanisms of electronic cells and biological neurons are very different, there are nevertheless certain similarities in terms of the respective functions performed. For example, both types of cell operate on signals which are essentially binary in nature — in terms of voltage levels in the electronic case and the generation or non-generation of voltage pulses in the biological case — and both compute a function relating an output signal to the pattern of signals appearing on their input channels at any instant. Structurally at least, therefore, the type of electronic network described above is a closer model of the brain than is a conventional computer system.

Furthermore it is possible, in principle at least, to characterise brain activity in terms of a state dia-

gram. Although a complete state diagram of the brain if it could be plotted exactly would contain about $2^{10^{10}}$ states (since it is estimated that the brain contains about 10^{10} neurons), a model of a neural network, which could of course be physically realised using our familiar electronic network structure, can be a very versatile means of characterising and formalising the brain mechanisms which underlie human behaviour.

In such a model, the transitions from one state to the next correspond to "thought processes", while learning is embodied in the fact that the element functions can change in response to information received by the network. It is possible, using this approach, to describe many psychological and physiological functions in terms of state-to-state activity, and processes such as recognition of environmental events, recall of stored information, long-term and short-term memory processes, and a mechanism of speech production are but a selection of functions which may be described and characterised in this way. The benefits likely to be obtained in this area are twofold since, not only can such endeavours lead towards a clearer implicit understanding of brain function itself, but such a characterisation of intelligent behaviour can give insight into the design of intelligent machines for many different purposes and applications.

What of the Future?

An article of this nature cannot hope to indicate all the areas of research currently in progress, nor deal in excessive detail with those topics which are described. Neither is it possible to predict with any degree of confidence likely levels of achievement of future generations of intelligent systems. One thing which is certain, however, is that the search for machines with a capacity for intelligent behaviour will continue and increase. One of the most encouraging features of the approach described here is that it focusses as a unified entity the work of engineers, physicists, mathematicians and even psychologists. It may be that the current trend towards cheaper and more readily available computing facilities and electronic components will provide exactly the right stimulus for even more widespread and interdisciplinary cooperation, and allow significant progress in this area. Indeed, it is this exciting possibility which is perhaps the main justification for the work described here.

Further Reading

Further reading on these and related topics can readily be found by scanning the scientific literature in cybernetics, computer science and digital electronics. To mention just one specific reference cannot do justice to such a wide and challenging field, but "The Metaphorical Brain" by M. A. Arbib offers a very readable and stimulating introduction to the basic aims of cybernetics, emphasising particularly the value of brain research in tackling engineering problems in artificial intelligence.

Phil Cohen visited the author of the above article at the Kent University to find out what the results of the research has been so far.

When I read the above article my immediate impression was: Fine, but does it work? To find out, I paid a visit to the Kent University's electronics lab, to see what they were up to.

While the system described in the above article is still in a fairly early stage of development, a very similar system built on slightly less advanced principles was very much in evidence.

The first thing I was shown was a computer simulation of a 'learning net' in action. The machine was pretending to be a network of cells connected as shown in Fig.5.

To explain its action: It was trying to recognise typewritten characters. Looking at figure 4, the digitised picture information is fed into the array at the top left of the diagram (the pattern shown is a letter "T").

There are several blocks of RAM attached to this array, each organised as 16×1 bits. The address lines are fed from different parts of the array, the entire array being covered all in all.

This entire network (i.e. the part of Fig.4 inside the dotted line) is dedicated to recognising one character.

What happens is this: During the 'teaching' mode, the letter to be recognised is fed in to the array. The 'teach enable' and the 'teach data' of the network are held high and a '1' will be fed into the location of each RAM which is indicated by the input pattern.

A variety of other patterns (i.e. other than "T") are then fed into the array and a "0" is fed into the locations indicated by the new patterns.

During the run mode, an 'unknown' pattern is fed in and the network which has been 'taught' to recognise it will produce a lot of "1"s at the RAM outputs.

Now looking at Fig.5, the system will see which network is producing the most "1"s and will output the character that that network (the one with the



One of the research team gives the apparatus a phonetic example (i.e. sings to it!).

most "1"s) is trained for. In this way the system can cope with 'noisy' patterns — they will still (hopefully) produce more "1"s in their network than in any other.


At Kent University they are using the system on data supplied by the GPO. The data consists of arrays derived directly from typewritten material.

The result is a very 'noisy' pattern indeed — a human has to look twice at it! The system seems to manage quite well, though.

An obvious application for this sort of system is in reading typed addresses for the GPO. Another, less obvious, use is in the teaching of handicapped children.



One of the data arrays provided by the GPO.

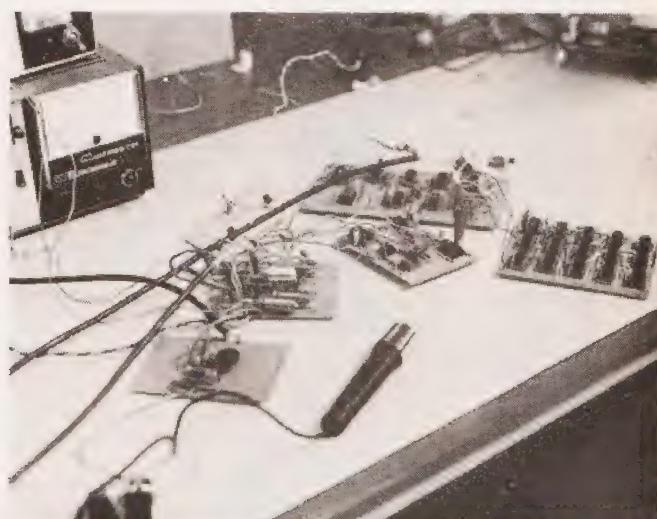

This sort of scene should be familiar to most ETI readers — an early prototype!

Teaching Aid

The department has developed a stand-alone unit (see photos) which will give an output which is proportional to hand-eye co-ordination.

What happens is this: Using a light pen, the teacher 'draws' a character (anything from a straight line to a pound sign) on an array of LEDs. These are multi-

plexed in such a way that the unit can follow the path of the pen.

The LEDs which have been pointed to remain on. In this way, the machine can be 'taught' to recognise the character.

Whenever the pupil 'writes' the same character, the unit will give an output which is related to how close

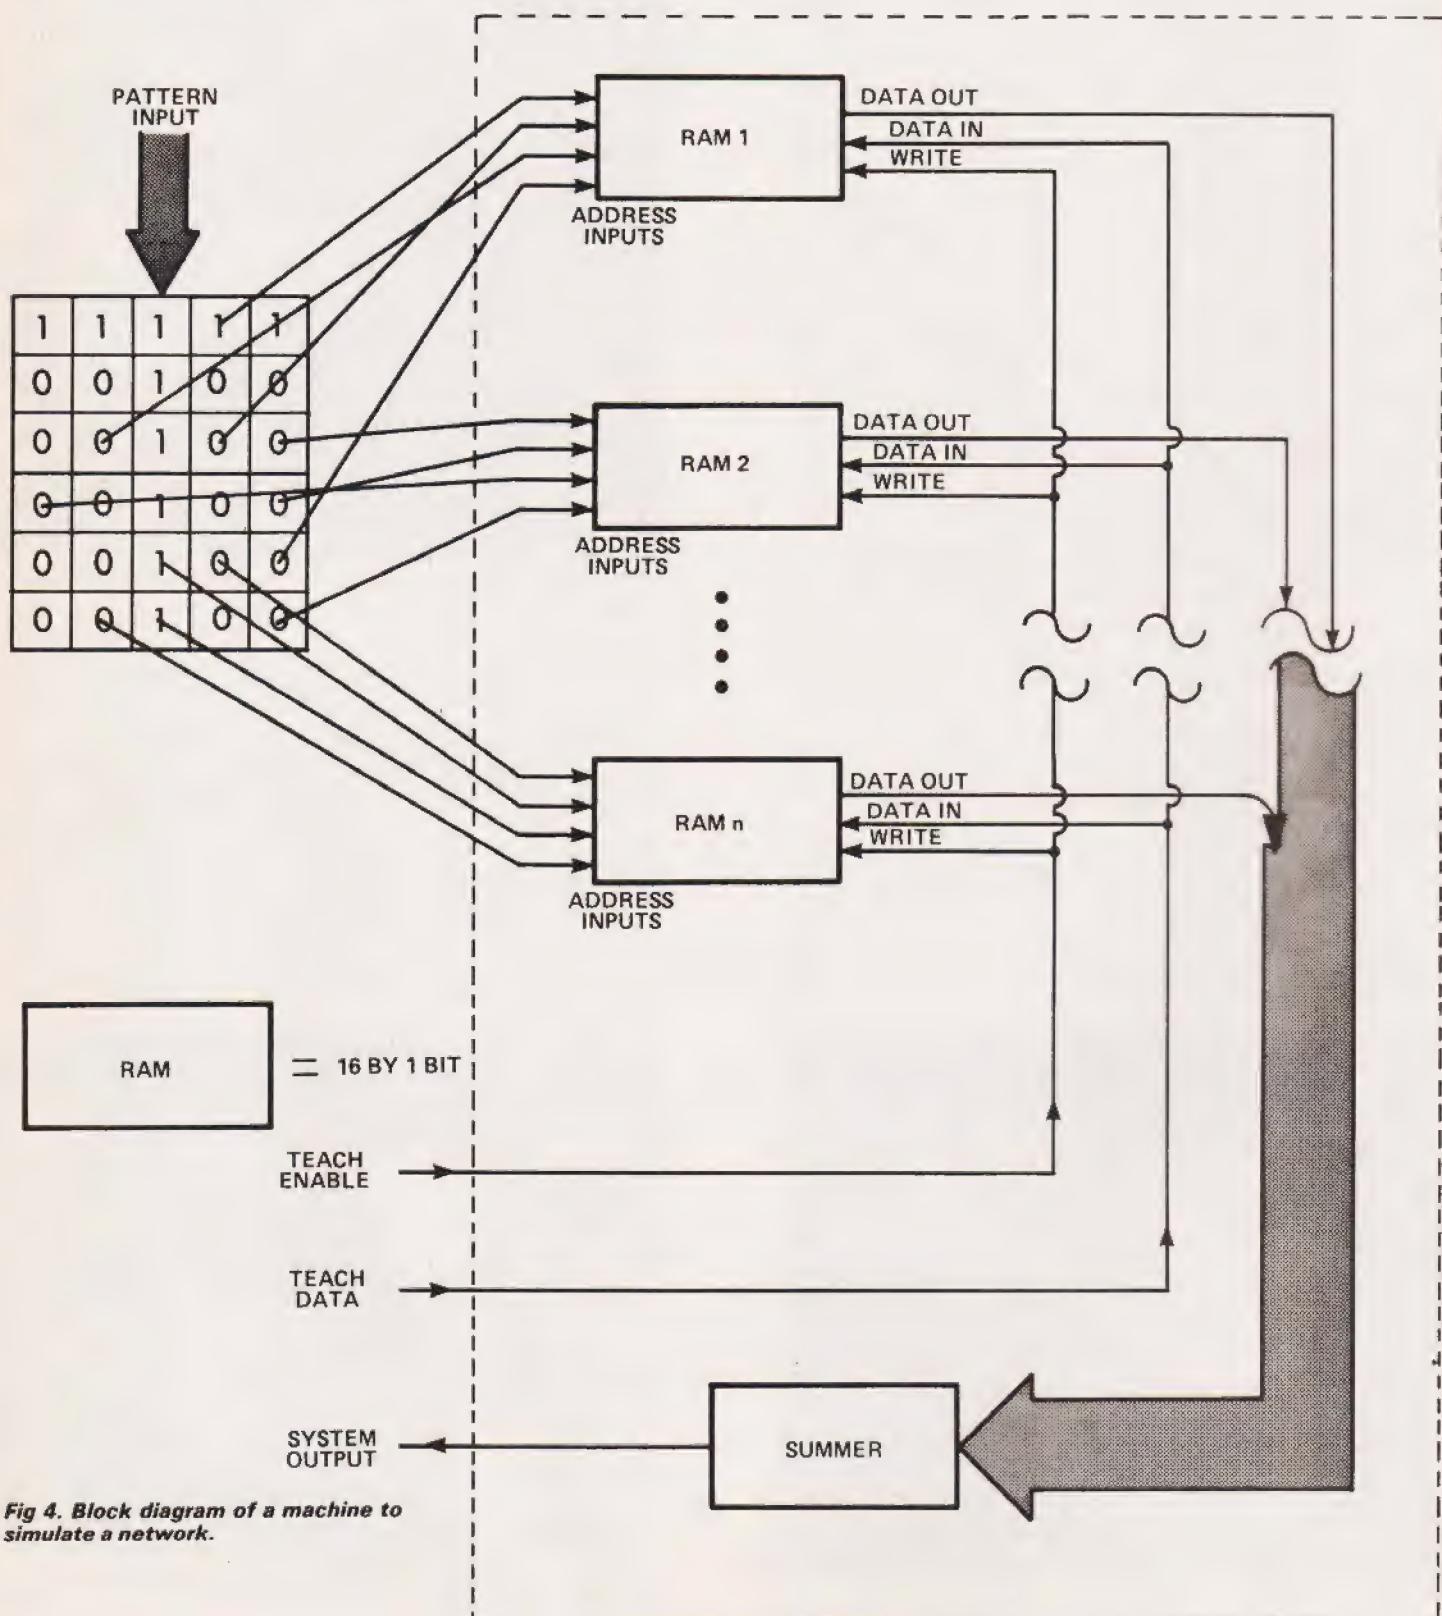


Fig 4. Block diagram of a machine to simulate a network.

Artificial Intelligence

the input is to the character it has been 'taught' to recognise. When the correlation passes a pre-set threshold, a lamp lights as a reward.

The advantages of the unit over conventional methods are:

A) It means that one teacher can teach several pupils at a time.

B) The 'threshold' of the unit can be increased slowly as the pupil progresses.

C) Preliminary trials have shown that the unit is successful because the kids enjoy using it!

The Future

There is also research going on into using a similar system to recognise sounds rather than visual patterns. In this respect the system offers several advantages over existing methods — It uses easily

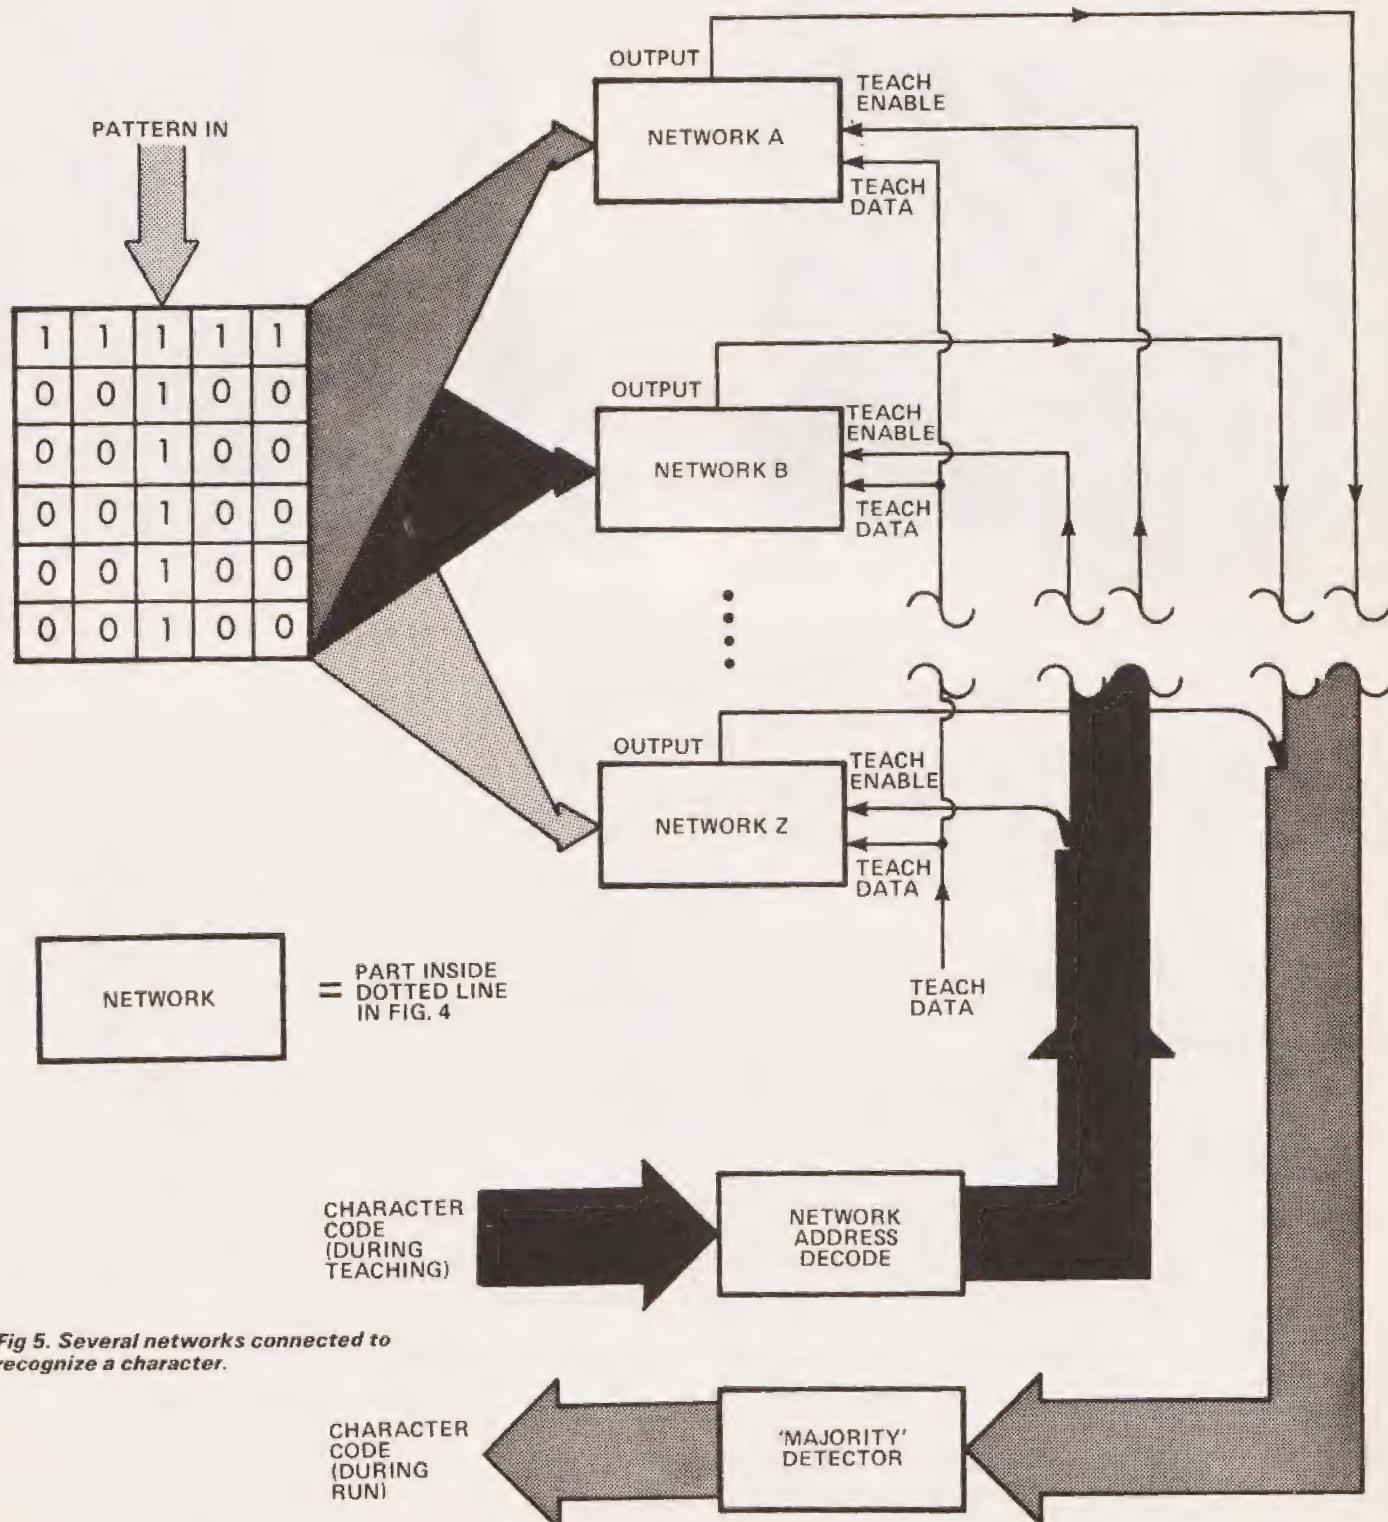


Fig 5. Several networks connected to recognize a character.


available RAM and a minimum of input 'pre-conditioning' circuitry (other similar systems use only a high-pass filter and a zero-crossing detector).

The tremendous advantage of this sort of character recognition over other systems is that it is cheap — the RAM is commercially available at a very low cost per bit already.

There is absolutely no reason why, given the time, trouble, and ingenuity (and RAM), an amateur shouldn't be able to build a system similar to the one in Fig.4 (or even Fig.5). We would, of course, be very interested to hear of anyone who has any success.



The machine in action — the light pen is being used to 'teach' it a character.

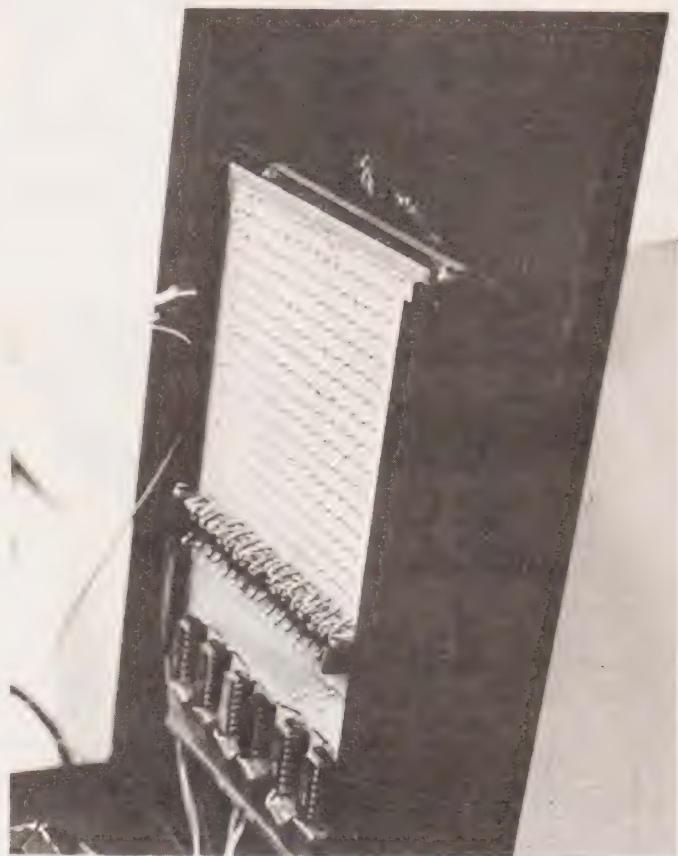

The underside of the LED array.

Letters

Dear Sir,

The article on shopping in the United States in "Microfile" Computing Today; November 1978, (Vol 7, No 11) overlooked the payment of Customs Duty and Value Added Tax. Most goods brought into this country from outside the EEC are liable to Customs Duty and Value Added Tax. This includes private importations of articles by post. Information concerning postal importation procedure is set out in more detail in Notice 143 obtainable from the Secretary HM Customs and Excise, Kent House, Upper Ground, London SE1 9PS, but a brief summary follows.

Any charges due are usually collected from the addressee by the Postman when he delivers the package. A label showing the amount payable (including the Post Office clearance fee) is fixed to the package. In certain cases the addressee is notified that a package has arrived at a Postal Depot, and is asked to complete a simple form. This form must be returned to the Postal Depot before the package can be delivered. No payment is to be sent, unless it is shown on the form that this should be done.

The charges which are assessed by the Customs Officer, who examines the package at a Postal Depot are usually a percentage of the current import value of the goods. This may not necessarily be the same as the value declared by the sender.

WHAT ARE THE RATES OF THESE CHARGES?

Items such as electronic micro-circuits, diodes, transistors, LED's and similar semi-conductor devices, are liable to duty at 17% ad valorem and to Value Added Tax at 8% or 12½% of the duty inclusive value, if for use in domestic electrical appliances. Thus the total charge levied on goods valued at £20.00 could amount to more than £6.00 and on goods valued at £100.00 it could exceed £30.00. This increase of about a third in the price that the purchaser had expected to pay for the goods could come as a shock and I think you will agree that they should be made aware of this possibility.

C. M. HUNTRY
H.M. Customs and Excise
Head of Information

UNREPEATABLE OFFER

EPROMS

UNTESTED ERASED EPROMS	
1702A (2K BITS)	£3.00
2758 (8K BITS) (limited qty)	£10.00

TRIACS

T2800D 8A 400V	£1.00
T2302B 2.5A 200V	£0.60
TIC225A 8A 100V	£0.45

CMOS

CD4001BE (NOR GATE)	£0.14
CD4049UBE (HEX INV BUFFER)	£0.30
CD4050BE (HEX BUFFER)	£0.30

TRANSISTORS

BD175	£0.40
2N4921	£0.40
BC300	£0.25

DIODES

1N4001	£0.04
1N4002	£0.04
1N4004	£0.06

MICROCOMPUTER BARGAINS

We have a stock of untested microcomputer PCB's which are surplus to our requirements. Each PCB contains an Intel 4040 (CPU), 4201 (clock), 4289 (standard memory interface), 5MHZ crystal, zero crossover detector OCT, power on reset OCT, sockets for 5 x 1702A Eprom and on board power supply (50V 50 HZ input) regulated to provide 15v DC supply. These PCB's are sold as untested units with data on all chips and OCT diagram at the bargain price of £19.00.

Also available:—

1702A (programmed to your hexadecimal requirements) £5.00

4265 (general purpose input output device suitable for use with the above PCB) £5.00

Please add 28 pence P&P to your order and VAT at 8%

Cheque / Postal Order to:—

RACE ELECTRONICS LTD.

54/64, Morfa Road, Swansea
Tel. (0729) 41241/462684

Mail Order supplies only

Please allow 21 days for delivery

YOU'VE ASKED FOR IT!

From next month
Computing Today will go
it alone.

Until now Computing Today has been presented as a free supplement to the ETI you know and love. Interest in the magazine has been so great, however, that we're going to launch the magazine in its own right.

That means more news, more software, more hardware, ad more ideas, more of everything that we've been doing over the past months.

On sale the second Friday
of every month.

Data Sheet

SF.F 96501 LOW SPEED MODEM (300 BAUD)

The SF.F 96501 circuit is a FSK (Frequency-Shift-Keying) modulator and demodulator compatible with CCITT standard low speed telephonic communication network (300 bauds).


PRINCIPAL FEATURES

- C-MOS technology
- Acoustic or electric coupling
- Cassette — tape recorder coupling
- Originate and answer modes
- Half-duplex et full-duplex operation
- Line frequency detection
- Inputs and outputs compatible with C-MOS 4000 B serie
- Crystal oscillator

PINOUTS

- 1 CRT display input
- 2 Tape recorder enable input
- 3 Originate and answer mode
- 4 Half-full duplex operation input
- 5 Local operation Input
- 6 Line modulator output
- 7 Line demodulator input
- 8 Vss
- 9 Line carrier detection input

Top view

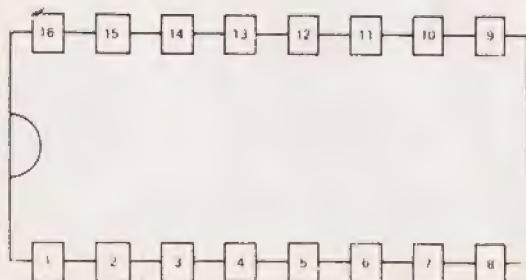

- 10 Tape recorder demodulator input
- 11 N/C
- 12 Crystal Oscillator input
- 13 Crystal Oscillator output
- 14 Tape recorder modulator output
- 15 CRT display output
- 16 V_{dd}

Pin functions	Pins Broches
CRT display input	1
This signal is a binary data input that is delivered in serial format from the CRT display to the modulators of the modem (line modulator or tape-recorder modulator). In this two cases this signal will be modulated using FSK techniques.	
Cassette-tape recorder enable	2
When a logic "1" the cassette-tape recorder input is enabled into the modem.	
Originate and answer modes	3
The mode input selects the pair of transmitting and receiving frequencies used during modulation and demodulation. When at logic "1", the modem operates in the answer mode. When at logic "0", the modem operates in the originate mode.	
Local Operation	5
When at logic "1" both the line modulator output and the line demodulator input are inhibited. Then, the modem operates only with the CRT display and the cassette-tape recorder.	
Line modulator output	6
The output line modulator is a sine wave produced by a digital-analogic synthesizer. It allows the realization of four following frequencies: 980, 1180, 1650, 1850 Hz.	
Line demodulator input	7
The line demodulator input is the FSK signal; that is a square wave resulting from external filter and limiter.	
Line carrier detection	9
A "1" state on this output indicates that the FSK signal from the telephone line is received and demodulated in the modem. When this output goes to a logic "0", the FSK signal is absent.	

Tape-recorder demodulator input 10
 This input signal receives a square wave from the tape-recorder (1200 or 2400 hertz).

Crystal oscillator input, output 12-13
 A standard 3.93216 MHz crystal is required to utilize the on chip oscillator.

Tape-recorder modulator output 14
 This output delivers a square wave (1200 or 2400 hertz per second) to the tape-recorder.


CRT display output 15
 This output sends out the binary data to the CRT display.

The DF F96501 is manufactured by Thomson-CSF Components, Ringway House, Bell Road, Daweshill, Basingstoke, RG 24 0QG and should be available soon.

Block diagram of the SF.F 96501

INPUTS

OUTPUTS

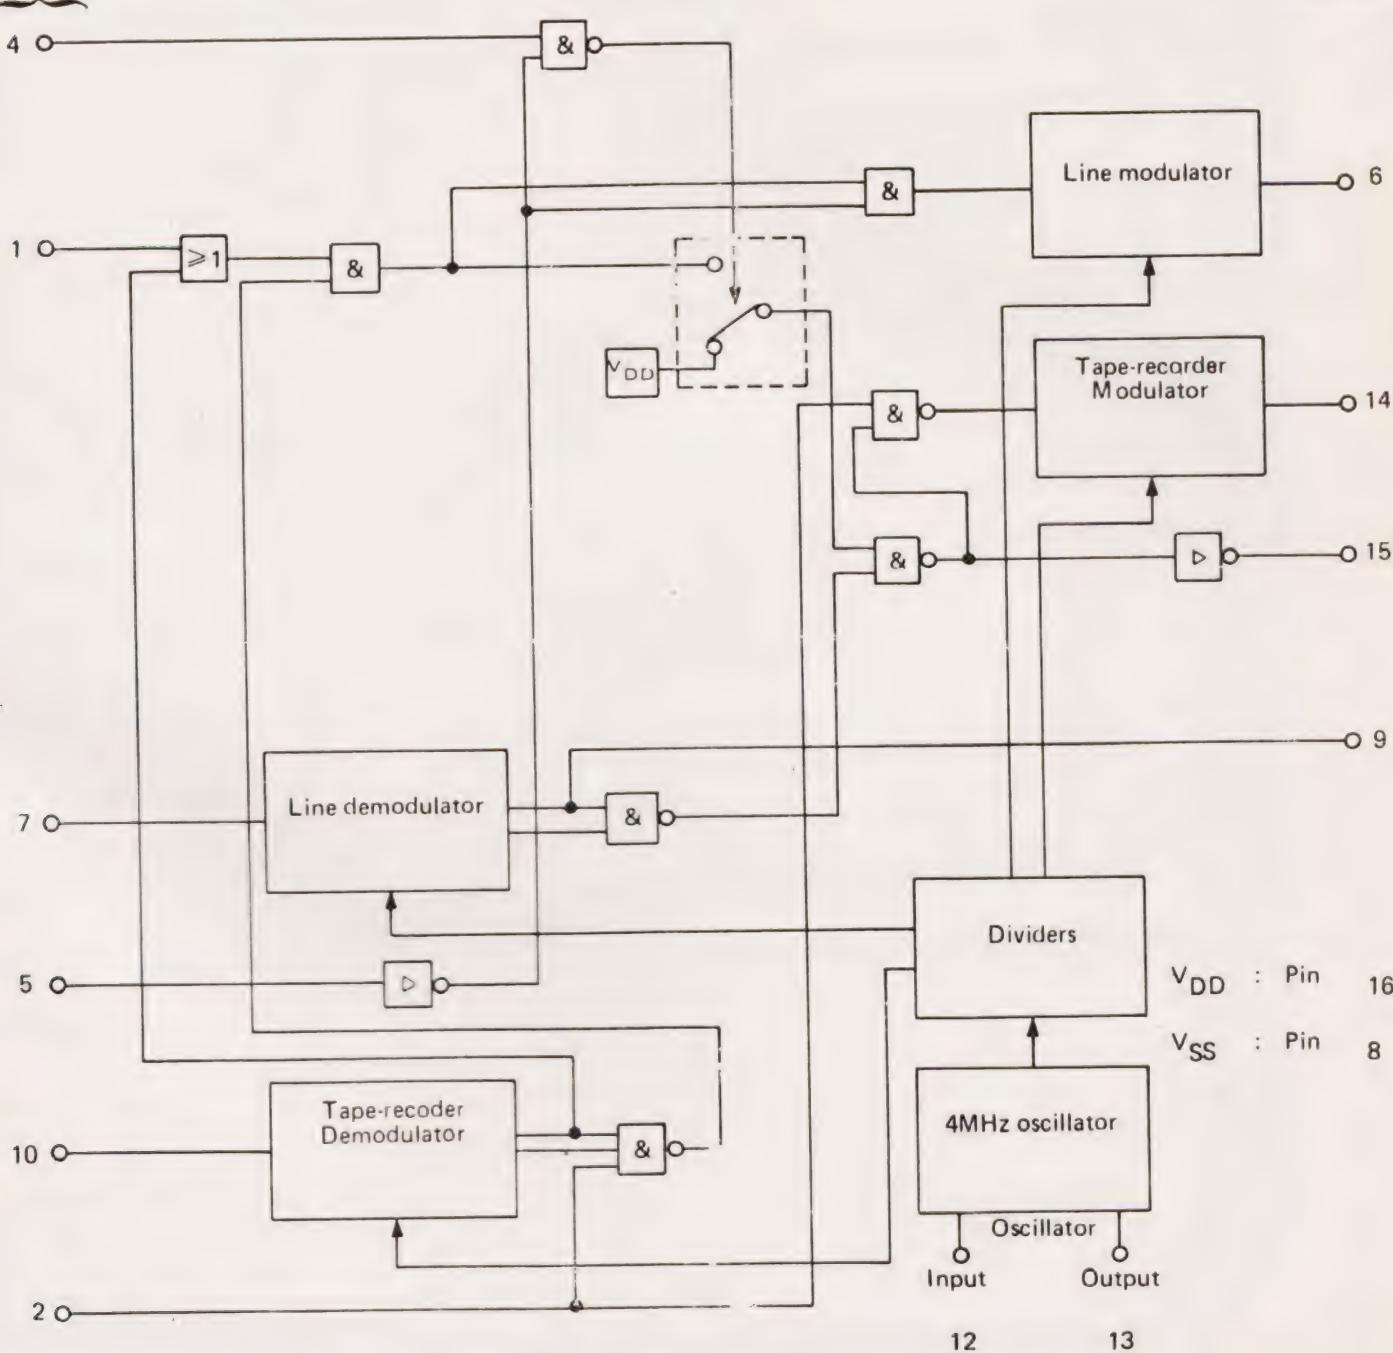

MICRODIGITAL

OF MERSEYSIDE

The Microcomputer only shop providing a complete service from a single chip to a commercial data processing installation. Well worth a visit for a look around and a chat.

NM

FREE with every Nascom purchased 10 C15 cassettes, 1 Coding Pad, Ribbon Cable for Keyboard, Keyboard Bleep Kit

Join the microcomputer revolution now with a Nascom 1. A complete computer on one board, connects to your domestic T.V. and cassette recorder. Unrivalled value for money: Z80 full professional quality QWERTY keyboard, powerful 1K Monitor, 2K RAM, good documentation and an active users club. Tried, tested and proven, in excess of 4,000 delivered. Kits and built up ex stock.

	£
Nascom 1 Kit.....	213.30
2.2 Amp power supply built.....	26.46
Buffer Board Kit.....	27.00
8K RAM Kit.....	91.00
16K RAM Kit.....	151.20
32K RAM Kit.....	216.00
Tiny BASIC in EPROM.....	27.00

BOOKS

Nascom Hardware Manual.....	1.50
Nascom Software Manual.....	1.50
Seminar Notes.....	1.50
Z80 Programming Manual.....	4.50
The Z80 Microcomputer Handbook.....	7.95
Z80 Programming for Logic Design.....	5.95

SERVICE

Kits built, tested, burnt in and guaranteed.....	54.00
Standard Repair Charge.....	27.00

BITS & PIECES

UHF Modulator with full instructions.....	2.70
Keyboard Beeper Kit.....	3.00
Keyboard ribbon cable, with plugs.....	4.00



Ring for availability of this superlative device.

Science of Cambridge

MK 14

This Kit is the least expensive complete home computer. Usually ex-stock, but ring to confirm.

MK 14 Kit.....	43.15
Socket Set.....	3.89
256 x 4 RAM (2 needed).....	3.19
INS 8154 RAM IO.....	8.82
Power Supply.....	5.75
Cassette Interface.....	6.34
Revised Monitor in ROM.....	8.59

BOOKS

A guide to SC/MP Programming.....	4.00
A guide to KITBUG.....	1.00



Our "mainframe" microcomputer the CASU Super C has 22 S100 slots and runs a Z80 at 4 MHz. It is British and has excellent hardware and software support. Nice features: CP/M, real time clock, hardware floating point, high speed peripherals, etc.

A variety of commercial software packages are now available at reasonable prices.



Read the reviews and the other advertisements for this remarkable computer. Our price includes:

16K of RAM, 8K of Microsoft BASIC, Internal 240V U.K. Power Supply	
UHF Modulated Video	
Output.....	£820.80



Newbear

We are stockists for Bearbags containing the 6800 based 77/68 system and for the new Panda integrated unit microcomputer with superb VDU and Basic in ROM.

APPLE II

Apple is a developed product with unmatched flexibility and versatility. Made to the highest professional standards Apple brings commercial computer quality at the price of a good Hi-Fi system.

Simply the best

16K APPLE..... £1063.80

Memory expansion. Apple certified, including jumper blocks, instruction manual and test cassette

16K..... £216.00

5 1/4" 112K minifloppy drive with controller and powerful disk operating system..... £459.00

Manuals available separately.

MAINS INTERFERENCE SUPPRESSOR

Computers are especially prone to interference from spurious signals in the mains supply. This unit cures most forms of this interference. Maximum current 3 Amps.....

£12.18

CHROMA CHIME DOOR CHIME KIT

The computer everyone can and does use. Twenty three more tunes than the neighbours!.....

£16.50

COMMODORE PET

Free PET BASIC tutorial with each PET bought from us.....

£695.00

MONITEL

Digital desk clock and telephone charge calculator. U.K. model.....

£28.08

CHESS CHALLENGER

Level 10.....

£185.00


Level 3.....

£120.00

ETI BOOK SERVICE

computing

BASIC: A Self Teaching Guide (2nd Edition) by ALBRECHT, R. L.	£4.50	Microprocessor Systems Design by KLINGMAN, E.	£14.35
Teach yourself the programming language BASIC. You will learn how to use the computer as a tool in home or office and you will need no special maths or science background.		Outstanding for its information on real microprocessors, this text is both an introduction and a detailed information source treating over a dozen processors, including new third generation devices. No prior knowledge of microprocessors or microelectronics is required of the reader.	
Illustrating BASIC by ALCOCK, D.	£2.20	BASIC Programming by KEMENY, J. G.	£6.10
This book presents a popular and widely available language called BASIC and explains how to write simple programs.		A basic text.	
Microprocessors by ALTMAN, L.	£10.65	Microprocessor and Small Digital Computer Systems for Engineers and Scientists by KORN, G. A.	£19.00
Gives a general overview of the technology design ideas and explains practical applications.		This book covers the types, languages, design, software and applications of microprocessors.	
Applying Microprocessors by ALTMAN, L.	£12.00	TV Typewriter Cookbook by LANCASTER, D.	£7.40
Follow up volume which takes you into the second and third generation devices		An in-depth coverage of tv typewriters (tvt's)—the only truly low-cost microcomputer and small-system display interface. Covers tvt terminology, principles of operation, tv configurations, memories, system design, cursor and update circuitry and techniques, hard copy, color graphics, and keyboards and encoders.	
Intro to Microprocessors by ASPINALL, D.	£6.00	Microprocessors — Technology, Architecture, and Applications by McGLYNN, D. R.	£8.40
Explains the characteristics of the component		This introduction to the "computer-on-a-chip" provides a clear explanation of this important new device. It describes the computer elements and electronic semiconductor technologies that characterize microprocessors.	
How to Buy and Use Minicomputers and Microcomputers by BARDEN, W.	£7.50	Programming Microprocessors by MEMURAN, R.	£5.50
Discusses these smaller computers and shows how they can be used in a variety of practical and recreational tasks in the home or business		A practical programming guide that includes architecture, arithmetic, logic operations, fixed and floating-point computations, data exchange with peripheral devices, compilers and other programming aids.	
How to Program Microcomputers by BARDEN, W.	£6.75	Microcomputer Based Design by PEATMAN, J. B.	£19.00
This book explains assembly-language programming of microcomputers based on the Intel 8080, Motorola MC6800, and MOS Technology MC6502 microprocessors.		This book is intended for undergraduate courses on microprocessors.	
Introduction to Microcomputers and Microprocessors by BARNA, A.	£7.50	Microprocessor and Microprocessor Systems by RAO, G. U.	£20.50
Provides the basic knowledge required to understand microprocessor systems. Presents a fundamental discussion of many topics in both hardware and software		A completely up-to-date report on the state of the art of microprocessors and microcomputers, written by one of the leading experts. It thoroughly analyzes currently available equipment, including associated large scale integration hardware and firmware.	
Microprocessors in Instruments and Control by BIBBERO, R. J.	£12.45	The 8080A Bugbook: Microcomputer Interfacing and Programming by RONY, P. H.	£7.60
Introduces the background elements, paying particular regard to the dynamics and computational instrumentation required to accomplish real-time data processing tasks.		The principles, concepts and applications of an 8-bit microcomputer based on the 8080 microprocessor IC chip. The emphasis is on the computer as a controller.	
Basic BASIC by COAN, J. S.	£7.50	6800 Software Gourmet Guide and Cookbook by SCELBI	£7.80
An introduction to computer programming in BASIC language.		8080 Software Gourmet Guide and Cookbook by SCELBI	£7.80
Microprocessor Programming for Computer Hobbyists by GRAHAM, N.	£7.00	Understanding Microcomputers by SCELBI	£7.60
The Computer Book by HAVILAND, R. P.	£6.20	Here's a description of the application, programming, and interfacing techniques common to all microprocessors. It concentrates on detailed descriptions of representative microprocessor families and includes explanations of digital codes, logical systems, and microcomputer organization.	
Building super calculators and minicomputer hardware with calculator chips		Microprocessors and Microcomputers by SOUCEK, B.	£18.80
Microcomputers, Microprocessors, Hardware		Here's a description of the application, programming, and interfacing techniques common to all microprocessors. It concentrates on detailed descriptions of representative microprocessor families and includes explanations of digital codes, logical systems, and microcomputer organization.	
Software and Applications by HILBURN, J. L.	£14.25	Microcomputer Primer by WAITE, M.	£6.25
Complete and practical introduction to the design, programming, operation, uses, and maintenance of modern microprocessors, their integrated circuits and other components		Introduces the beginner to the basic principles of the microcomputers. Discusses the five main parts of a computer — central processing unit, memory, input/output interfaces, and programs. The important characteristics of several well-known microprocessors are given and a chapter is included on programming your own microcomputer.	

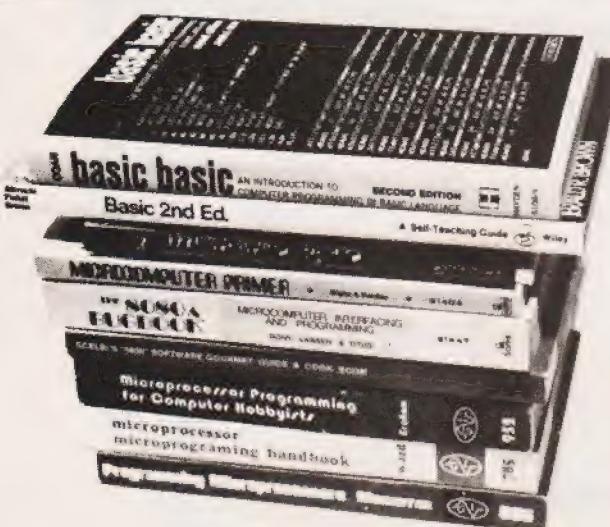

HOW TO ORDER:

Make cheques etc payable to ETI Book Service. Payment in sterling only please. Orders should be sent to: ETI Book Service, PO Box 79, Maidenhead, Berks. All prices include P & P.

Bally Arcade: More Than Fun

The Arcade is part of a new wave of machines. But who's it for? Graham M. Wideman and Mark J. Czezwinski report.

IT HAS BEEN several months since we have looked at the "popular" computer scene and as expected the aim of some of the new products has moved still further toward the "consumer." In other words, companies are looking for bigger and bigger markets, to people who have (initially) less and less knowledge or experience of computers.

It was a couple of months after our February review that the Commodore PET was finally approved and offered for sale in Canada. Already there are a number of active and enthusiastic PET user clubs. The accessories and adjuncts also are now coming available.

Meanwhile, at the Radio Shack camp, the TRS-80 (basic model reviewed in April) has also been available for some time, and is on display at numerous Radio Shack outlets. This machine can be had with or without the much improved BASIC language version known as "Level II". An extensive collection of accessories present and future strengthen Radio Shack's computer line.

Upon reviewing these two machines we were aware that they were a new step in microprocessor based computers, in that they required no hardware knowledge and allowed the owner to start with nothing more than the willingness to learn about BASIC. A big part of this was the fact that these machines have BASIC language built in (in ROM) so there's no time consuming loading of the BASIC interpreter off cassette, nor the agony and heartbreak of BASIC bomb-out due to a bug in your program. For anyone familiar with the earlier hobbyist (fanatic!) computers, this is real luxury!

The general public is at least becoming aware of these small computers, as the PET may be seen at several department stores, and the TRS-80 receives national TV advertising publicity.

But will this attract the big market? How far can you go towards the consumer to get him to buy a computer? With these questions in mind we were very interested to see the Bally Arcade. ▶





Fig 1. Calculator style keyboard is labelled with calculator functions. Arrow scrolls display.

THE ARCADE ITSELF

The least you can buy is the Bally Arcade "box", which on the outside has a calculator style (and labelled) keyboard (Fig. 1), a slot for a Bally cassette (Fig. 3, more on this below), and on top a rack for storing such cassettes. On the back are a number of sockets for plug in accessories, included with the unit are two hand controls. From the back of the unit also extend the cables for power cord and output to your colour TV's antenna input.

So what can you do with this unit. It may sound initially like a disappointment at \$599, but this unit as it enables you to play 3 video games and to use the machine as a four function calculator with TV display. We have to say however that they are pretty amusing, interesting and skill testing games.

We spent hours with our favourite, "Gunfight," where two six-shooter equipped cowboys march onto the screen to the tune of "Home on the Range", and then each player with hand control walks his man around the screen shooting at each other. (Realistic gun sounds). Various obstacles appear in subsequent shootouts, cacti, trees and a wagon. The graphics and action are quite good, with varying gun angle, and bits of cactus and tree which can be shot off. More tunes are played if one cowboy hits the other, (who falls dead on the ground).

This and the other games, apart from being entertaining, demonstrate the machine's ability to produce four colour graphics, and play tunes, both of a nature very sophisticated in comparison to simple video games. One of the games in fact allows you to change (using the keyboard) each of the four colours to others.

The calculator feature was not very impressive, being a simple four function model (10 memories, floating point). It does allow you to see the preceding


steps (about 100) of your calculation like a printing calculator, which is good if you don't need the actual paper. One distressing point was that there is no minus sign to indicate a negative number, it simply turns from black to red, which is not so useful if you have a black and white TV. However, it does firmly tell the user that this is not just a video game.

THE "CASSETTE"

So far we haven't stretched the capability of the micro-processor yet, so let's look at an as yet unused feature, the "cassette". It is not an audio tape cassette, but a similar looking package, which contains up to 8K of ROM (permanent memory), and has a row of



Fig 2. One of the two hand controls supplied with the Arcade. Sockets on the machine accommodate two more.

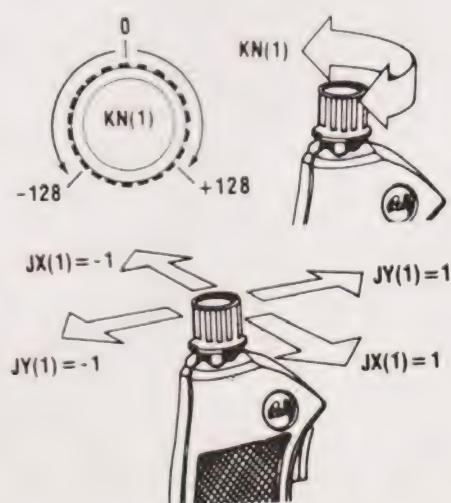

contacts along the edge which connect to those in the cassette slot. (Fig 3). This is quite a clever concept in that the public is already familiar with audio cassettes of similar shape, and does not have to be introduced to a new plugging idea.

A wide range of games cassettes are or will be available at \$34.95, with such appetite whetting names as "Desert Fox", "Space Race", and "Red Baron" (represented on our cover), "Backgammon" and some "educational" games like "Spell'n'Score" and "Crosswords".

However, the most interesting cassette is the one that allows you to program the machine in BASIC language, price \$99.95.

BALLY BASIC

This is not a language for the serious programmer, since in the way of numbers it will handle integers only, up to about 33,000. However, it does include the familiar set of BASIC functions which enable the user to become acquainted with programming. The most important aspect here is motivation, and the user will find this, as Bally has made manipulation of the inputs, sound and graphics quite easy.

Hence the new programmer can quickly be designing his own games, "video art", accompanying tunes and some graphing etc. The BASIC instruction book is quite comprehensive and gentle in its explanations, and has numerous examples and entertaining programs.

The programmer has available 1800 "memory locations", 26 integer variables (A-Z) and one array called `@`. While there is no real character or string variable one can fudge it. An attempt to store a character (enclosed in quotes) in the `@` array results

in its ASCII code value being stored. Hence `@(1)`, "1" results in `@(1)` equalling 49. To recover the letter however you would have to write a program with lots of IF statements to decipher the section of the `@` array which you know is supposed to be characters.

BASIC IN USE



The BASIC kit includes an "overlay" which fits over the keyboard to tell you its new functions. Just as a typewriter has two "cases", the keyboard now has five cases, with the bottom row used when selecting one of four "upper" cases. Referring to Fig. 5, the numbers (and similarly positioned functions) may be obtained by simply pressing that key. The functions such as FOR, TO, NEXT, GO TO etc are obtained by first pressing "WORDS" then the appropriate key. The letters and characters in the white boxes above each key are actually coloured, and are obtained by first pressing the same coloured button at the bottom next to the "WORDS" key.

Needless to say, this keyboard is cheaper than a full keyboard, and can be faster, in that only 2 keystrokes are required to enter something like "LINE" or "STEP" and so on, but it can get confusing. You can of course always see what you've entered since it's on the screen, (and when you push one of those other four buttons the screen changes to that colour!). If you make a mistake you can "backspace" over characters in the same line, but to go back and change a line already entered you'll have to retype the line.

There are two other buttons on the Bally, RESET and EJECT (cassette). You don't want to hit either of these after you've entered a program, otherwise agony! We found the EJECT button much too easy to accidentally brush, perhaps Bally could supply a piece of cardboard to stick over it! ▶



Fig 3. Just stick it in and pop it down (left).

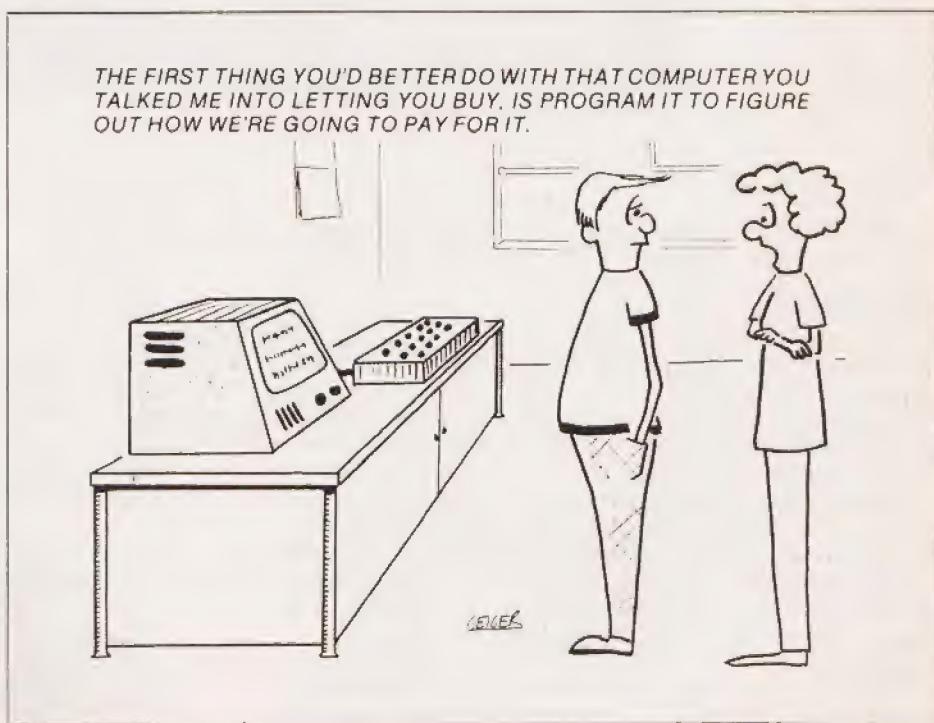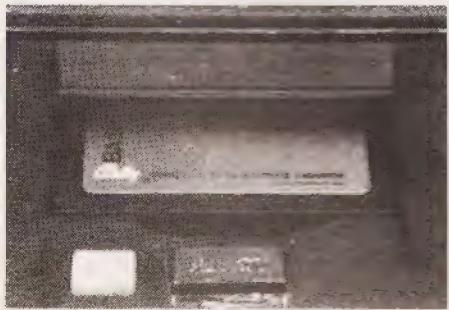

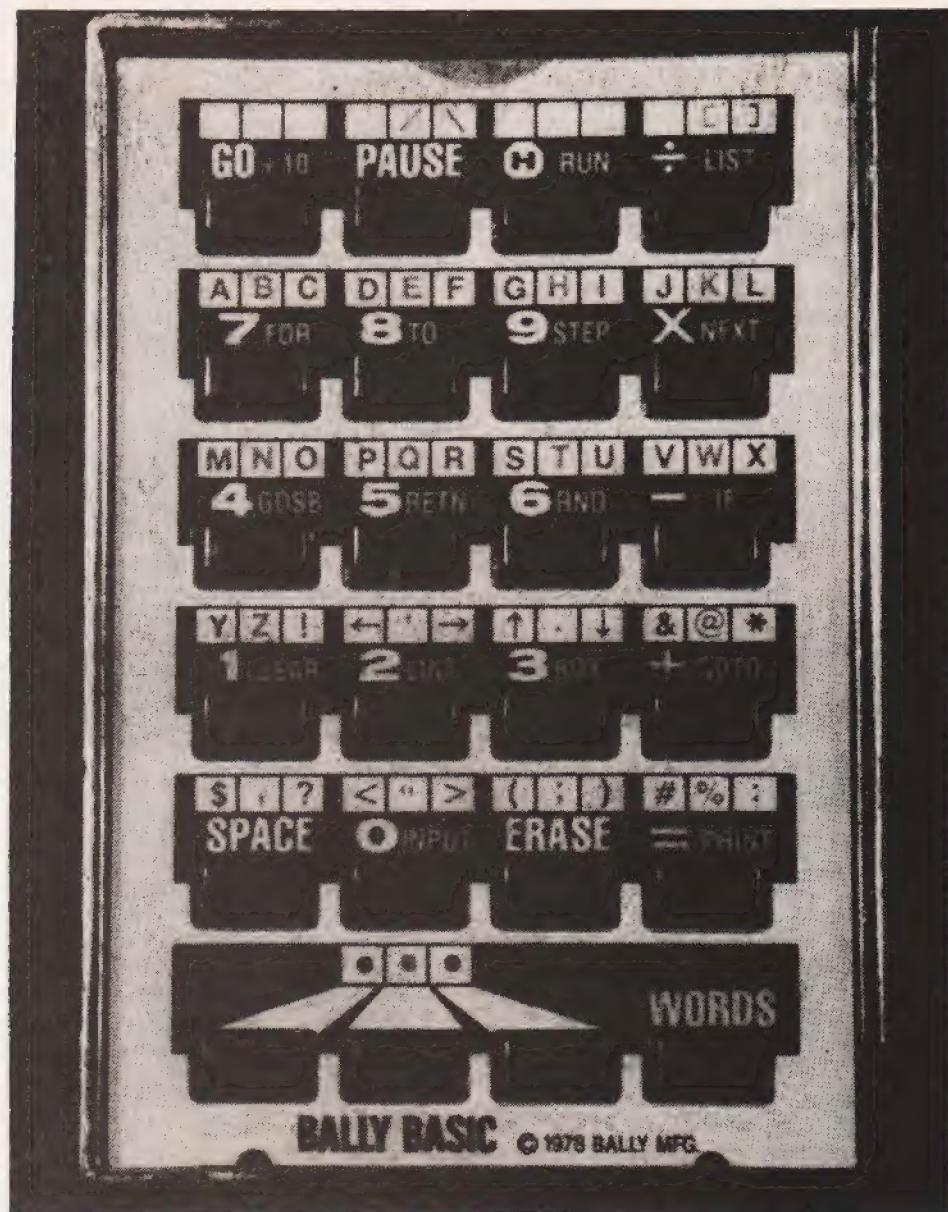


Fig 5. BASIC overlay on keyboard shows functions and instructions available.

GRAPHICS

The very best part of this BASIC is the easy interfacing, best described by explaining some of the "machine variables". To input from a hand control, simply look at the values of JX, JY, TR or KN, which correspond to the joystick, trigger, knob positions. To pick the colours for the screen you set BC and FC from 1 to 256 to select the "background" and "foreground" colours. (Only two colours available when using BASIC). To draw on the screen you can write a dot, line or box using only one statement to specify its position, size, and colour. (Fig. 6)

While this is quite a respectable capability, it won't allow you to program games as complex graphically as the Bally has built in, due to speed and memory constraints.

SOUND

As each character is printed on the screen a note plays from the TV's speaker. The note varies with each character, may be raised or lowered by an octave using the multiply and divide signs, and made sharp or flat with the plus and minus signs. (Fig. 7) A simple PRINT statement with a series of numbers and




Fig 6. For graphics purposes the screen is divided into 88 x 160 squares.

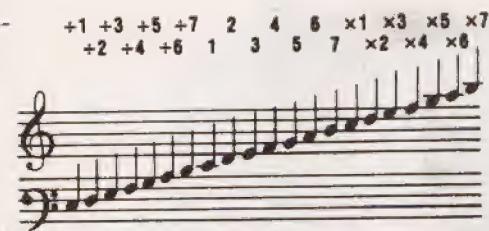


Fig 7 (above). The numbers corresponding to the musical scale.

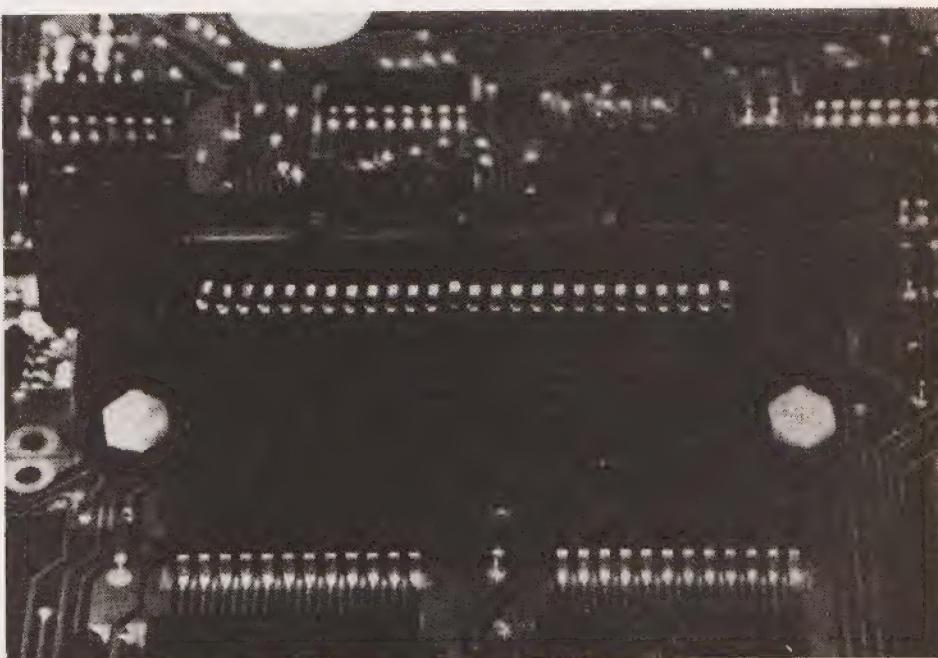


Fig 9 (right). Cassette socket attached directly to the board.

signs plays an interesting tune. "Rests" are available, and the note speed can be varied using the machine variable NT. NT however also varies the print-out speed, so don't set it too slow while you're programming or you may never finish. Its initial value is quite satisfactory.

Now, to a musician this doesn't sound like a lot of capability (it's more than enough for punk rock). It's surprising how good it does sound, though, and the simplicity contributes to learning about sound and music. But please Bally, give us some nice satisfying gun and explosion sounds!

AUDIO CASSETTE

In order to store programs for long periods of time the user can purchase the BASIC audio interface to allow recording and retrieving with an ordinary cassette recorder.

HARDWARE

We took our review unit apart (carefully!) and here's what we found inside. Heart of the Arcade is the powerful Zilog Z80 microprocessor (actually Mostek's version: 3880). This is accompanied by 8K of ROM which stores the games, and 4K of RAM which mostly acts as the screen memory. Although the cassette pack is reportedly capable of containing 8K of additional ROM, ours appeared to have only 4K (Fig 10). When the BASIC cassette is in use, half of the 4K RAM is used for program storage, which means that only half as much screen memory is available explaining why only two colours are available to the programmer.

The various support chips are described in Fig. 8. Of special note is the "music processor" chip, which generates the musical tones of the chromatic scale from a single master oscillator.

As shown in Fig. 2 the hand controller gives 3 types of control: trigger, rotary, and "joystick". The trigger is simply a switch; the rotary control is a potentiometer; and the joystick uses four switch contacts, one each for 0, 90, 180, and 270 degrees, and pairs of

Fig 10. BASIC cassette exposed.



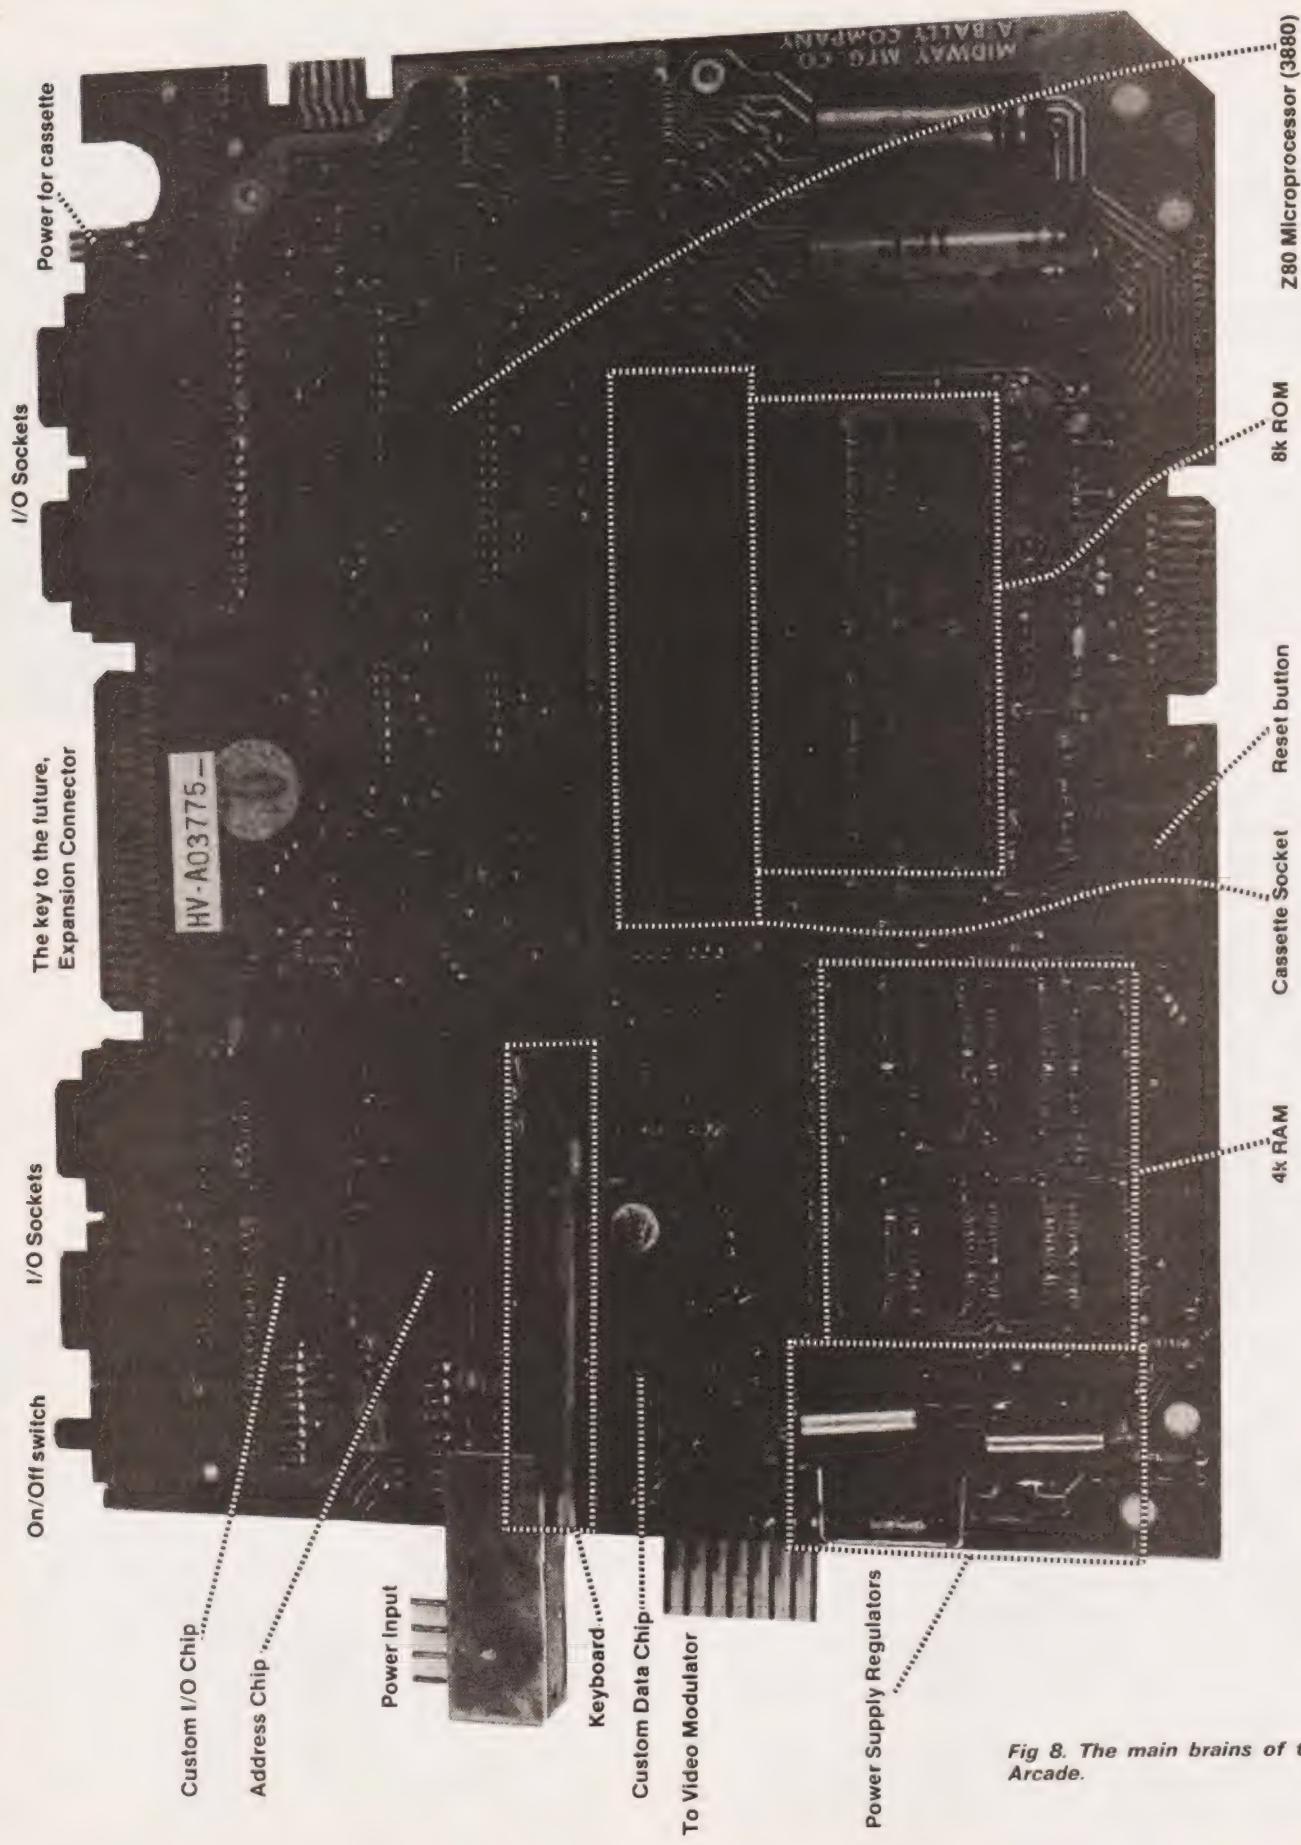


Fig 8. The main brains of the Arcade.



Fig 11. Open hand control shows trigger switch, pot and four way joystick switch module.

those contacts used for the intermediate angles 45, 135, 225 and 315 degrees. We found that a little surgery with pliers was required to get all the intermediate angles to work properly, but this was probably due to the hard use that the demo unit had received. This is not a high quality precision control by any means, but it certainly works, and hardware enthusiasts will easily be able to use their own switches and pots for other input applications. (Fig. 11).

WHAT'S COMING

What's available so far appears to be only the iceberg tip. The first upgrade will be a proper keyboard box, which will reportedly include an additional Z80, more RAM, and ROM containing a "serious" BASIC version. Interface for two independent screens and IEEE 488 bus is also being talked about. This is apparently to be introduced in January 79. Also coming are a printer, telephone interface, light pen and floppy disk. Do these sound like add-ons for a video game?

It's pretty obvious that the Bally Arcade is in a new class of product, and will be the most "vertically" extensive product line we have seen so far. The machine has the capability to endear itself to all ages and familiarity-with-computer levels. Once the person is interested they will feel the desire to expand the system and not be afraid to dabble in programming, with the basic BASIC. After some confidence has been obtained with the concept of programming, the user might be encouraged to move up again to the keyboard expander box and advanced BASIC. This is a much more "expand-as-you-learn" approach than the kind of expandability of early home computers, where you had to be pretty knowledgeable to start, and expand as boards became available.

In fact, a learning experienced is that the Arcade is all about, not just in programming, but it is an

intriguing exercise in music composition (albeit quite simple), and in colour graphics it provides a no mess, no manual skill artistic tool.

WHERE

The Bally Arcade should start to appear in October 78. It is distributed by Paragon Enterprises, through Zenith Radio's dealer network and also through large department stores. Calculator shops may also be interested, Marketron is already planning to handle the product.

COMPETITION

If this market is going to be big, you can be sure that Bally aren't the only people who thought of getting into it. We have sketchy details of two other possibly similar products being announced in the US (where the Bally Arcade sells for \$300). Magnavox has its "Odyssey 2", which has a full touch keyboard and two joysticks, and a plug in cartridge system. It does not appear to have programming capabilities however. Meanwhile, there's a home computer from Interact, again with full keyboard, colour display output, but this time with an audio cassette unit built in; US \$499. Finally, Atari is rumoured to have something in the works. Even if it wasn't rumoured you can bet they have.

Approved Nascom UK Distributors

Nascom-1 available at £197.50 plus VAT from:

Barrow-in-Furness	Oldham, Lancs
Camera Centre	Lock Distribution
Tel: 0229-20473	Tel: 061-652 0431
Torquay	Chesham, Bucks
CC Electronics	Lynx Electronics
Tel: 0803-22699	Tel: 02405-75151
Egham & Manchester	Liverpool L2
Electrovalue	Microdigital
Tel: 07843-3603	Tel: 051-236 0707
Glenfield, Leicester	New Barnet, Herts
Eley Electronics	Comp Components
Tel: 0533-871522	Tel: 01-441 2922
London W2	Glasgow
Henry's Radio	Strathand
Tel: 01-723 1008	Tel: 041 552 6731
	Bristol
	Target Electronics
	Tel: 0272 421196



Nascom Microcomputers

Softspot

Production of graphics via a system's BASIC interpreter results in problems due to the inherent slowness of such software. Machine code subroutines are a way to overcome this drawback. Here Mike Hughes has written such a program for the Triton.

Although it is quite easy to use the VDU function within TRITON'S BASIC to produce moving graphics on the display screen you are limited to the speed with which movements can be made. This is due to the inefficiency of an interpreter program. Much better use of TRITON'S memory mapped VDU can be made with programs written in machine code.

This one gives a picture of a simple railway engine followed by a couple of trucks which move across the screen from right to left. As they leave the screen on

the left they re-enter again from the right but one line up the screen. The process continues until the train reaches the left-hand side of the fifth line from the top of the screen and then the program repeats itself.

Enter the program starting at address 1600H but when you run it you should start at 1602H. The reason for this is that locations 1600 and 1601 contain the necessary end of file address to allow you to run the program out to tape after you have keyed it in once.

1600		DATA		AE	End of file address (used by tape I/O)
1601		—		16	
1602	START	CALL	CLRSCN	CD	Clear screen; reset cursor
1603		—		34	
1604		—		01	
1605		LXI H	LNTBL	21	Load start of line character position index table
1606		—		A8	
1607		—		16	
1608		MVI M	60H	36	Starting low order address in VDU for first character of first line
1609		—		60	Increment table pointer
160A		INX H		23	Starting high address in VDU for first line character
160B		MVI M	13H	36	Increment table pointer
160C		—		13	Starting low address in VDU for second line character
160D		INX H		23	Increment table pointer
160E		MVI M	AOH	36	Starting high address in VDU for second line character
160F		—		A0	Increment table pointer
1610		INX H		23	Starting low address for VDU for third line character
1611		MVI M	13H	36	Increment table pointer
1612		—		13	Starting high address in VDU for third line character
1613		INX H		23	Increment table pointer
1614		MVI M	EOH	36	Point DE to start of first line graphics data table
1615		—		E0	
1616		INX H		23	
1617		MVI M	13H	36	
1618		—		13	
1619	MOV1	LXI D	LNE1	11	
161A		—		5D	
161B		—		16	
161C		LHLD	LNTBL	2A	Load HL with first character address in first line of VDU (obtained from table)
161D		—		A8	
161E		—		16	Decrement VDU character pointer
161F		DCX H		2B	Check if high order address points to fourth line on screen
1620		MOV A, H		7C	
1621		CPI	10H	FE	
1622		—		10	
1623		JZ	START	CA	If it does; start again
1624		—		02	

1625	—		16	
1626	SHLD	LNTBL	22	Store fresh start of first line in table
1627	—		A8	
1628	—		16	
1629	CALL	MVLNE	CD	Move graphics data to VDU
162A	—	°	52	
162B	—		16	
162C	MOV2	LXI D	LNE2	11
162D	—		76	Point DE to start of second line graphics data table
162E	—		16	
162F	LHLD	LNTBL + 2	2A	Load HL with first character address ' in second line of VDU
1630	—		AA	
1631	—		16	
1632	DCX H		2B	Decrement VDU character pointer
1633	SHLD	LNTBL + 2	22	Store fresh start of second line in table
1634	—		AA	
1635	—		16	
1636	CALL	MVLNE	CD	Move graphics data to VDU
1637	—		52	
1638	—		16	
1639	MOV3	LXI D	LNE3	11
163A	—		8F	Point DE to start of third line graphics data table
163B	—		16	
163C	LHLD	LNTBL + 4	2A	Load HL with first character address in third line of VDU
163D	—		AC	
163E	—		16	
163F	DCX H		2B	Decrement VDU character pointer
1640	SHLD	LNTBL + 4	22	Store fresh start of third line in table
1641	—		AC	
1642	—		16	
1643	CALL	MVLNE	CD	Move graphics data to VDU
1644	—		52	
1645	—		16	
1646	DLY	LXI B	2000H	01
1647	—		00	Load BC with time delay byte 2000 (these two bytes may be altered by the user)
1648	—		20	
1649	DCX B		0B	Decrement BC
164A	MOV A, C		79	Move contents of C to accumulator
164B	ORA B		B0	OR B with contents of accumulator
164C	JNZ	DLY + 3	C2	If not zero; keep decrementing
164D	—		49	
164E	—		16	
164F	JMP	MOV1	C3	Repeat complete move cycle
1650	—		19	
1651	—		16	
1652	MVLNE	MVI B	19H	06
1653	—		19	Set B to number of characters in a line which have to be moved
1654	LDAX D		1A	Get character from data table
1655	MOV M, A		77	Store it in VDU memory
1656	INX D		13	Increment table pointer
1657	INX H		23	Increment VDU memory pointer
1658	DCR B		05	Decrement character counter
1659	RZ		C8	Return if zero
165A	JMP	MVLME + 2	C3	Otherwise keep transferring data
165B	—		54	
165C	—		16	
165D	LNE1	DATA	SPACE	20
165E	—		SPACE	20
165F	—		GRAPHIC	7A
1660	—		SPACE	20
1661	—		SPACE	20
1662	—		SPACE	20
1663	—		GRAPHIC	7A

1664		GRAPHIC	19		
1665		SPACE	20		
1666		SPACE	20		
1667		T	54		
1668		R	52		
1669		I	49		
166A		T	54		
166B		O	4F		
166C		N	4E		
166D		SPACE	20		
166E		SPACE	20		
166F		T	54		
1670		R	52		
1671		I	49		
1672		T	54		
1673		O	4F		
1674		N	4E		
1675		SPACE	20		
1676	LNE2	DATA	GRAPHIC	15	Data for second line
1677			GRAPHIC	7A	
1678			GRAPHIC	7A	
1679			GRAPHIC	7A	
167A			GRAPHIC	7A	
167B			GRAPHIC	7A	
167C			GRAPHIC	7A	
167D			GRAPHIC	7A	
167E			GRAPHIC	73	
167F			GRAPHIC	73	
1680			GRAPHIC	7A	
1681			GRAPHIC	7A	
1682			GRAPHIC	7A	
1683			GRAPHIC	7A	
1684			GRAPHIC	7A	
1685			GRAPHIC	7A	
1686			GRAPHIC	73	
1687			GRAPHIC	73	
1688			GRAPHIC	7A	
1689			GRAPHIC	7A	
168A			GRAPHIC	7A	
168B			GRAPHIC	7A	
168C			GRAPHIC	7A	
168D			GRAPHIC	7A	
168E			SPACE	20	
168F	LNE3	DATA	SPACE	20	Data for third line
1690			O	4F	
1691			GRAPHIC	73	
1692			O	4F	
1693			GRAPHIC	73	
1694			O	4F	
1695			GRAPHIC	73	
1696			O	4F	
1697			SPACE	20	
1698			SPACE	20	
1699			SPACE	20	
169A			O	4F	
169B			SPACE	20	
169C			SPACE	20	
169D			O	4F	
169E			SPACE	20	
169F			SPACE	20	
16A0			SPACE	20	
16A1			SPACE	20	
16A2			O	4F	

16A3	SPACE	20
16A4	SPACE	20
16A5	O	4F
16A6	SPACE	20
16A7	SPACE	20
16A8	LNTBL TABLE	

Start of table containing VDU's initial character positions

Note that the table of data between 165D and 16A7 contains the hexadecimal codes for alpha and graphic characters which make up the picture. The picture is contained within three lines. There are twenty-five characters making up each line of the picture and the last one in each case is a SPACE (Hex code 20). Provided you work within this 25 character/3 line format you can substitute codes for your own graphics but you MUST finish each group of 25 with a space code otherwise you will leave a trail behind the moving picture!

KEEPING TRACK OF VDU MEMORY MAPPING

The TRITON has a special 1024 byte memory which is used by the Thompson CFS Chip for the screen display. When using TINY BASIC, data bytes can be written into this memory using the VDU command.

Unfortunately, the memory is a write only memory and once written to, it is not possible to access the information again.

When programming, the programmer sometimes requires to keep track of which bytes of the VDU memory have been used. To do this using the array @ would require 1024 elements (each of 2 bytes). Even if the characters were packed two per element, 1024 bytes of array would be used.

A much better way to keep track of which bytes of VDU memory have been used is to use a bit map. To do this in TINY BASIC we make use of the array @ and use 15 bits of each element. Therefore only 69 elements of the array are used to map all 1024 bytes.

At the start of the programme it is necessary to zero the bit map

```
10 FOR I=0 TO 68
```

```
20 @ (I) = 0
```

```
30 NEXT I
```

A subroutine is then used to test if the required byte has been used

```
100 X = N
```

```
110 GOSUB 500
```

```
120 IF Y = 1 PRINT 'BYTE USED'
```

```
130 IF Y = 0 VDU N, 122
```

As variants you can alter the speed of movement by changing the timing byte in locations 1647 and 1648 (make these 00 to 10 respectively to double the speed). You can also change the jump instruction after location 1623 so that the screen is not cleared after a complete cycle. To do this enter 05 and 16 in locations 1624 and 1625 respectively.

Using the logic of this demonstration as an example you should be able to devise moving pictures of your own.

Written for the Nascom

Among the programs written to run on the Nascom—1 and available now are:

ICL Dataskil Letter Editor

This software provides a comprehensive set of data operations. Text can be input, displayed, edited, stored on tape, retrieved and further amended. Control functions include cursor, character, word, line, scrolling, tabbing, tape store and retrieve, text printing. All in less than 2K byte plus workspace for up to almost two full screens. Price on cassette £70 plus VAT.

TINY BASIC

A 2K BASIC Interpreter in 2x2708 EPROM. Normal commands: 1-32767 MSL/single array/arithmetic constant/<>≤≥≠/#/strings valid in print/listing description and user manual/additional three level keyboard control/compatible with NASBUG and B.Bug Price £25 Plus VAT.

An extended version of the above is our TINY BASIC PLUS which has all the TINY BASIC functions plus increased operator manipulation in all sub-routines. Price in 3x2708 EPROM £32 plus VAT.

ZEAP

An editor assembler which runs under NASBUG and provides the powerful advantages of writing programs in Z80 assembly language instead of directly in machine code. Uses less than 3K bytes of memory and is supplied on cassette priced £30 plus VAT.



Nascom Microcomputers

121 High Street,
Berkhamsted,
Herts.
Tel: (04427) 74343

N is the number of byte of screen memory to be tested. GOSUB 500 executes the subroutine which tests if the byte has been used.

Y is set to 1 if the byte has already been used and 0 if not. The bytes position in the bit map is set on during the routine for future subroutine calls.

The bit testing and setting routine is as follows:

```
500 Y = 0
510 A = X/15
520 B = X-A*15 + 1
530 C = @((A))
540 d = 16384
550 FOR E = 1 TO 15
560 IF C < D GOTO 590
570 IF E = B GOTO 640
580 C = C - D
590 IF E = B GOTO 620
600 D = D/2
610 NEXT E
620 @((A)) = @((A)) + D
630 RETURN
640 Y = 1
650 RETURN
```

The routine first takes the memory index X and

splits it into the element index and bit number. The contents of the appropriate element is then extracted and the process of testing if the appropriate bit is on is started. The routine is complicated by the fact that other higher bits may be on in the element and it is not possible to test just a specific bit.

Therefore the routine starts with the highest possible bit position and tests if this is on. If not on, the routine checks if this was the required bit. If it was, it is turned on in the array and the routine returns to the caller indicating the bit was off when tested.

If the tested bit is off but it is not the required bit, the routine selects the next highest bit and starts the testing again.

If the tested bit is on, the routine checks if this was the required bit. If it was, the routine returns to the caller indicating the bit was already on when tested.

If the tested bit is on but it is not the required bit, the bit is turned off in the variable containing the elements contents and the routine continues to test the next highest bit.

This is all very complicated but a quick test during some values will show how it works.

Some people will notice that statement 590 is sometimes executed unnecessarily. It was felt that a GOTO command after statement 580 would not make the routine much faster and only uses up more memory.

AT LAST!

The COMP NASCOM S100 expansion kit for STATIC RAM and EPROM boards

Ex stock—Available now £47.50

Why not do it the Cary way (and now!)

Comp brings to you an S100 Motherboard (with full buffering) to connect to your NASCOM 1.

This easy to construct kit contains all that you need to add on (trouble free) S100 STATIC RAM, 16k or 8k and EPROM boards.

Please make cheques and postal orders payable to COMP, or phone your order quoting BARCLAYCARD or ACCESS number.

COMP COMPUTER
COMPONENTS

14 Station Road, New Barnet, Herts. EN5 1QW.
Telephone: 01-441 2922 (Sales) 01-449 6596
CLOSE TO NEW BARNET BR STATION — MOORGATE LINE
OPEN — 10am to 7pm — Monday to Saturday



A more interesting way to learn



what is a microprocessor?

If you are considering buying a Micro-computer, Development System, or just want to learn more about this exciting technology, then this short introduction to Microprocessors is for you. Comprising of a 72-page book keyed to over two hours of cassette tapes the many aspects of Microprocessors are explained, including Binary and Hexadecimal counting, Internal structure, Operation, Programming Techniques, Devising a program, etc. Learn at your own pace with this valuable addition to your reference library.

To Technical Book Services
P.O. Box 79
Maidenhead, Berks SL6 2EG

ORDER FORM


Please send me copy/copies of What is a microprocessor? @ £10.75 each inclusive. I enclose remittance £.....

Name _____
(Print Please)
Address _____

Registered office 21, Mincing Lane, London EC1 Registered No 12225

LOW COST R.F. MODULATOR Only £ 2.—

includes p.&p.!



Converts ordinary T.V. into Video-Monitor. Use it for computing or video-games. This board has a special Video IC and is easy to build (ten minutes). No special adjustments, works always. Tuning by turning potentiometer. Low Power 5 volt. Kit includes all parts, epoxy p.c. board and assembly instructions written in English.


How to order: Just put two banknotes of £ 1.— (total £ 2.—) in an envelop, put your name and address on the back (in capitals please) and send it to us. Or, send us your undersigned Barclays or Eurocheque for a value of £ 2.—.

Address to: Musicprint Computer Products B.V. Your video R.F. Modulator will be P.O. Box 410, 4200 AK GORINCHEM. shipped the same day we receive THE NETHERLANDS your order

dealer inquiries invited

LOW COST CASSETTE INTERFACE Only £ 8.75

includes p.&p.!



Convert your cassette-recorder into a digital recorder. Easy to build, no adjustments! Uses Kansas City Standard. High speed, till 1200 Baud. Full Duplex, which means that you can (if necessary) use the interface with 2 cassette recorders at one time. Audio in- and outputs connects directly to cassette recorder. Data in- and outputs are T.T.L. compatible. Low Power, only 5 volt needed. Kit includes all parts, heavy epoxy p.c. board with edge connector and clearly written manual in English. Board also available assembled and tested for £ 11.75 incl. p.&p.

How to order: Send us your Barclays or Eurocheque in an envelop, put your name in capitals on the back or send the total amount of your order in banknotes in an envelop to us, you receive the difference (25 p.) in the package back. Kit £ 8.75 includes p.&p. Assembled and tested (guaranteed for 90 days) £ 11.75 incl. p.&p. Send your order to: Musicprint Computer Products b.v., P.O. Box 410, 4200 AK GORINCHEM. THE NETHERLANDS. Phone 010 - 31 18 30 - 24693. Your cassette interface will be shipped the same day we receive your order.

dealer inquiries invited

One year, three seminars
and 12,000 kits later,
Nascom presents

APPLICATIONS 79

Two one day seminars to be held in London in the Spring of 1979.

Day one will be on small business applications. Day two will be specifically aimed at the personal user.

Write for further details now.



Nascom Microcomputers

121 High Street,
Berkhamsted,
Herts.
Tel: (04427) 74343

Britain is a nation of PET lovers

THE No. 1
Personal
Computer
in the
U.K.

Hobbyist
Commercial
Scientist
Education

Affordable
£695
inc. VAT

for the first time
user and the professional
check out the PET, the world's
most popular personal computer



- * **CAPABLE** - just like a traditional computer.
- * **UNDERSTANDABLE** - fast, comprehensive and powerful - BASIC is one of the easiest computer languages to learn, understand and use. Machine language accessibility for the professionals.
- * **PERSONAL** - easily portable and operated - just "plug in" and go. Unique graphics make fascinating displays.
- * **EXPANDABLE** - built in IEEE-488 output, 8K RAM expandable to 32K, parallel user port 2nd. Cassette interface.
- * **SERVICEABLE** - easily serviced - only 3p.c. boards all readily accessible.

Features of PET's extended BASIC include

Integer, floating point and string variables; A full set of scientific functions, Logical operators, Multi-statement lines. String functions, Left \$, Right \$, Mid \$, Chr \$. Val, Str \$, Peek, Poke, Usr, Sys, to interface to memory and machine language subroutines. Time of day variable.

Future Commodore developments * FLOPPY DISC * PRINTER
* MEMORY EXPANSION * MODEM

Extensive software readily available.

Contact your nearest PET dealer, call today for a demonstration

In case of difficulty call COMMODORE SYSTEMS DIVISION
360 Euston Road, London. Tel. 01-388-5702

AUTHORISED PET COMMODORE DEALERS

Bristol
Sumlock Tabdown Ltd
0272-26685

Derby
Davidson-Richards (Int) Ltd
0332-366803

Durham
Dyson Instruments
0385-66937

Grimsby
Allen Computers
0472-40568

Guildford
P.P.M.
0483-37337

Hemel Hempstead
Data Efficiency Ltd
0442-57137

Kettering
H.B. Computers Ltd
0536-83922

Liverpool
Dams Office Equipment Ltd
051-227-3301

London W.C.2
TLC World Trading Ltd
01-839-3893

Manchester
Cytek (UK) Ltd
061-832-7604

**Sumlock Electronic
Services**
061-228-3507

Newport
G.R. Electronics Ltd
0633-67426

Northern Ireland
Medical & Scientific
08462-77533

Nottingham
Betos (Systems) Ltd
0602-48108

Reading
C.S.E. (Computers)
0734-61492

Southampton
Symtec Systems Ltd
0703-37731

Thame, Oxon
Memec Systems Ltd
084-421-2149

Woking
Petalect Ltd
048-62-69032



NASCOM 1 MICRO-COMPUTER for the HOBBYIST

As reviewed in E.T.I. Nov. '78:
"Overall the Nascom is an excellent unit"

THE COMPLETE MICRO-COMPUTER

NOW FREE "B" BUG
WITH EVERY NASCOM

FEATURES

- ★ Supplied in kit form for self-assembly
- ★ Full documentation supplied
- ★ Fully screened double-sided plated through hole printed circuit board
- ★ Full 48 key keyboard included
- ★ 2K x 8 Ram
- ★ 1K x 8 monitor program in Eprom
- ★ Powerful Mostek Z80 CPU
- ★ 16 x 48 character display interface to std un-modified T.V.
- ★ T.V. display memory mapped for high speed access
- ★ On board expansion to 2K x 8 Eprom
- ★ On board expansion for additional 16 I/O lines
- ★ Memory may be expanded to full 60K (plus 4K existing on board)

SOFTWARE FEATURES

- ★ 1K x 8 monitor program providing
- ★ 8 operating commands: supporting Mem. examine/modify, tabulate, copy, break, single step execute tape, load, tape dump.
- ★ Reflective monitor addressing for flexible monitor expansion through user programs.
- ★ Monitor sub-routines include — delay ASCII coding, binary to hex conversion, clr screen, scroll up, string print, cursor shift and many others.

EXPANSION

★ Expansion buffer board	£25.00
MEMORY KITS (inclusive all hardware)	
8K	£85.00
16K	£140.00
32K	£200.00
★ I/O board with decoders and all hardware except ICS will accept up to 3 PIOs, 1 CTC and 1 UART	£35.00

NEW "B-BUG" extended monitor in 2K of EPROM. Fully software compatible with NASBUG, supporting additional features — Full keyboard shift for all 128 characters, full cursor movement routines, Read and Write commands (fast tape load and dump), H and N commands (for inserting ASCII code directly into programme), Arith. command (for calculating relative jumps), Generate command (for automatic programme start), Intelligent copy (for non-destructive re-location of DATA), Random, block handling, ASCII to BCD and BCD to ASCII routines and many more. 2 EPROMS + full documentation — £21.66.

★ S.a.e. for full expansion details.

OTHER HARDWARE

★ 3A power supply for up to 4K expansion	£19.90
★ 8A power supply for larger than 4K expansion	£60.00
★ Expansion card frame	£29.50
★ Programming manual	£4.00
★ Hardware & software manuals (supplied in kit)	£3.00

Export Trade, Government and Educational Enquiries Invited

Add VAT at 8% on all items except manuals



Demonstrations Continuous at our Store



Construction
Manuals
Separately
£3.00

Complete Kits
NOW IN STOCK

£197.50
+ VAT 8%
POST PAID

Sole Appointed
London
Stockists

HENRY'S
RADIO

HENRY'S RADIO
404 Edgware Rd. London W2
PHONE (01)723 1008

COMPUTING TODAY — FEBRUARY 1979

WHAT'S MISSING?

An ETI T-Shirt of course!

Our little lady is perfectly intact thank you! We took her T-Shirt away just to show you how lost you'd be without one.

(At least that's what we told her anyway.)


After all they are printed back & front on high quality cotton — black logo on red background — and cost a mere £2.00 all inc.

Orders to:

ETISHIRTS
25-27 OXFORD ST
LONDON W1 1RF

Please specify size — S, M, or L and allow 14 days for delivery.

Computer standard

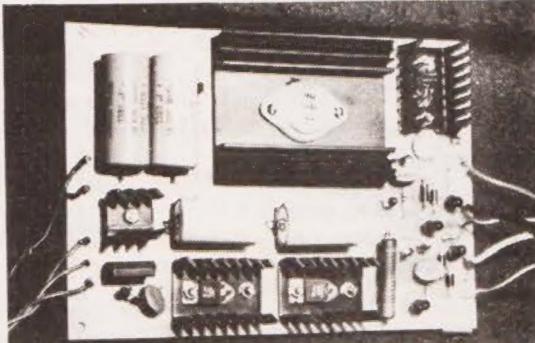

3A PSU

Computers require a reliable and even power supply. The redesigned and uprated Nascom 3A PSU meets these requirements. Its output voltages are +5V 3A; +12V 1A; -12V 1A; -5V 1A. And are sufficient to drive the Nascom-1, buffer board and up to 32K of RAM. It has LED displays on all the outputs and will fit into the Nascom frame to be announced soon. Price of PSU kit — £24.50 plus VAT.

A buffer board kit with edge connectors suitable for the NASBUS and with edge connectors and inter-connectors to attach directly to the Nascom-1 is available at £25.00 plus VAT.



Nascom Microcomputers

121 High Street,
Berkhamsted,
Herts.
Tel: (04427) 74343



Room ET
313 Kingston Road, Ilford
Essex IG1 1PJ, England

From the representatives in Europe . . . for America's leading Micro-computer magazines and books,
for the hobbyist, educationist and professional alike, we bring you a little light browsing!
Reading maketh a full man . . . Francis Bacon (1561-1626)

Introduction to Microcomputers: Volume 0: The Beginners Book Volume 1: Basic Concepts Volume 2: Some Real Microprocessors (without binder) Volume 2: Some Real Microprocessors (with binder) Volume 3: Some Real Support Devices (without binder) Volume 3: Some Real Support Devices (with binder) 6 Updating supplements for Vol. 2 (for 1 year) 6 Updating supplements for Vol. 3 (for 1 year) 6 Updating supplements for Vol. 2 or Vol. 3 (for 1 year) 1 Updating supplement for Vol. 2 1 Updating supplement for Vol. 3	£5.95 £5.95 £18.95 £24.70 £11.95 £17.70 £18.95 £18.95 £30.00 £5.75 £4.00 £4.00	£6.50 £7.95 £7.95 £7.50 £7.50 £7.50 £7.50 £7.50 £9.50 £4.25
6800 Programming for Logic Design 8080 Programming for Logic Design Z80 Programming for Logic Design	£5.95 £5.95 £5.95	£5.95 £2.55
Basic Computer Games What To Do After You Hit Return 8080 Galaxy Game The Colossal Computer Cartoon Book Computer Rage (A Board Game) Artist and Computer Games with a Pocket Calculator Games, Tricks and Puzzles for a Hand Calculator	£5.50 £7.00 £7.95 £3.95 £6.95 £3.95 £1.75 £2.49	£4.95 £4.75 £7.95 £5.50 £4.95 £3.95 £7.95
Z80 Instruction Handbook 8080 Programmers Pocket Guide 8080 Hex Code Card 8080 Octal Code Card	£4.00 £2.25 £2.25 £2.25	£10.95 £10.95 £10.95
Dr. Dodd Journal Vol. 1 Best of Byte Scelbi Byte Primer Best of Creative Computing: Vol. 1 Best of Creative Computing: Vol. 2 Best of Micro	£10.00 £8.95 £9.95 £6.95 £6.95 £6.95	£17.50 £17.50 £26.95 £7.95 £7.95 £32.50 £26.95
8080A / 8085 Assembly Language Programming 6800 Assembler Language Programming 8080 Software Gourmet Guide and Cookbook 6800 Software Gourmet Guide and Cookbook Microcomputer Programming: 6502 / 6800	£6.95 £6.95 £7.95 £7.95 T.B.A.	£9.95 £9.95 £15.95 £1.75 £5.75
MAGAZINE SUBSCRIPTIONS	U.K. price £16.00 £20.00 £13.00 £8.50 £8.00 £21.00 £16.00 £10.00 £20.00 £7.50	Overseas price £17.00 £20.50 £13.50 £9.00 £8.50 £21.00 £16.50 £10.50 £21.00 £21.00 £8.00
Subscriptions start within 3 weeks Personal Computing (12 per year) Interface Age (12 per year) Dr Dobbs Journal (10 per year) Computer Music Journal (4 per year) Peoples Computers (6 per year) BYTE (12 per year) Creative Computing (12 per year) Calculators and Computers (7 per year) Kilobaud (12 per year) 73 (12 per year) MICRO-6502 Journal (6 per year)	£1.75 £2.25 £1.75 £1.75 £2.50 £1.75 £1.75 £1.75 £2.25 £1.75 £1.75	
MAGAZINE BACK ISSUES	Personal Computing Interface Age Dr Dobbs Journal ROM Computer Music Journal Peoples Computers BYTE Creative Computing Calculators & Computers Kilobaud 73 Micro-6502 Journal	£1.75 £2.25 £1.75 £1.75 £2.50 £1.75 £1.75 £1.75 £2.25 £1.75 £1.75
		Magazine Storage Box (Holds 12) £1.25

HOW TO ORDER

Tick required items or write letter.

Please note our prices include postage and packing, but not insurance, if wanted add 12p for every £10 of books ordered. Make cheques, P.O.'s etc. payable to:—

L.P. Enterprises.

CREDIT CARDS accepted
BARCLAYCARD VISA / ACCESS
DINERS CLUB / AMERICAN EXPRESS
Phone: 01-553 1001 for Credit Card
orders (24-hr service)

Send to address above
Indicate Payment Method:

All Orders must be Prepaid
Total Enclosed £.....

My cheque, P.O., I.M.O. is enclosed in **Sterling** on U.K. Bank

Charge to Barclaycard / Visa / Access / Diners / American Express

Credit Card No.

Expiry Date

Name

Address

POSTCODE

Signature

All publications are published in U.S.A. and shipped air-freight by **L.P. Enterprises**. In unusual cases, processing may exceed 30 days.
Trade enquiries welcome.

Airamco Ltd.

MICRO COMPUTER PRODUCTS

Distributors for JADE COMPUTER PRODUCTS

All products brand new with full industrial specification

STOP PRESS!

SD SALES Z-80 STARTER KIT

Single card development system — like a KIM or D2 but uses Z80, on board PROM PROG up to 2K RAM. 2 x 5100 sockets provided for on board — plus many new features.

KIT PRICE £159.00
ASSEMBLED + GUARANTEE £249.95

S100 COMPUTER CARDS KIT

	ASSEMBLED	BARE BOARD
Mother Board	£82.50	£26.25
Desk Top Rack, 12 slot mother board + 15A @8V, 2A @± 16V		
£199.00		
Jade 8080A CPU BOARD	£122.50	£22.50
Jade 8K static RAM BOARD 450nS	£112.50	£19.95
Jade 8K static RAM BOARD 350nS	£119.96	£19.95
Jade 8K static RAM BOARD 250nS	£142.50	£19.95
S.D. Sales "EXPANDORAM" Dynamic Memory 375nS access time 8K	£229.00	£189.00
£113.25	—	—
Memory 375nS access time 16K	£337.00	£297.00
£189.00	—	—
Memory 375nS access time 32K	£553.00	£513.00
£297.00	—	—
Memory 375nS access time 64K	£165.00	—
£513.00	—	—
VERSAFLOPPY DISK CONTROLLER (up to 4 drives 5 1/4 or 8")	£385.00	—
£111.75	—	—
SHUGART 8" Drive	£225.00	—
PERTEC 5 1/4" Drive	—	—

Components

2708 1024x8 EPROM	£6.99	AY-5-2736	£9.50
2516 2048x8 EPROM	£29.90	21L02-1 450nS	£1.20
(equivalent of above) T1		8 for	£7.92
1702 256x8 EPROM	£4.85	21L02 250nS	£1.40
2104 4096x1 DRAM	£3.50	8 for	£9.60
8 for	£26.00	2112-1 256x4 (450)	£2.25
2107B-4 4096x1 DRAM	£3.50	4044 4Kx1 (450)	£7.45
8 for	£26.00	4045 1Kx4 (450)	£8.25

Note New Low Prices 16K Dynamic Memory	£10.50
8 for	£75.00

AY 51013 UART	£4.50
AY 51014 UART(5V)	£6.50
AY 53600 ENCODER	£9.99
8080A CPU	£8.99
2114 (450ns)	£6.75

Secondhand ASR 33 Teletype with paper tape £399.00
Shugart Floppy Disc Drive Controllers, 8-inch and 5-inch

All Prices EXCLUDE VAT @ 8%.
Trade discounts on Quantity.
Please add £1.00 P&P for S100 items then add VAT @ 8%.
24-hr. Ansaphone order service with ACCESS or BARCLAY-CARD.
MAIL ORDER ONLY



For components please add 40p P&P, then add VAT @ 8%.

ARIAMCO LTD.
30 WITCHES LINN
ARDROSSAN
AYRSHIRE
KA22 8BR
TEL. 0294 65530
TELEX 779808 RAMCO

Semiconductor prices are always changing and the trend is generally downwards. So ring for latest up-to-date details.

Hard Copy

This printer puts word processing within the scope of your pocket



TOP QUALITY TYPESCRIPT. SOLENOID DRIVEN FOR TTL CONTROL. ROM DECODED TO ACCEPT ASCII PARALLEL DATA INPUT. 8 CPS. 11" CARRIAGE (125 CHARS)

Fully built with PSU and case £182.86

Also supplied as print mechanism only.

Includes motor, solenoids and driver circuits.
Add your own logic and case £144.65


Add £3.50 p&p, then add VAT.

Other printers available; tally-roll dot matrix printer and low cost teleprinter. Send for details.

KIMBERLEY BUSINESS RECORDS
2, Hartington Road, Gosport, Hants.

GOSPORT 86642

The great RAM sale



The Nascom system offers major expansion at sale prices. To give you as much choice as possible we offer RAM boards in three configurations to accommodate up to 16 memory ICs of either MK4027 or MK4116, all socketed.

The memory board kit options are:

8K £85.00

16K £140.00

32K £200.00

Boards will also accommodate up to four EPROMS of type 2708 at £10.50 plus VAT each. And if you wish to upgrade 16K to 32K it will only cost you an additional £70.

Memory boards plug straight into a NASBUS and an edge connector is included for this. All boards must be used in conjunction with the buffer board which, like the memory boards, is available in kit form ex-stock from approved Nascom distributors.

121 High Street,
Berkhamsted,
Herts.
Tel: (04427) 74343.




Nascom Microcomputers

W-J E**2708 EPROM PROGRAMMER**

Program your own
2708s in approx. 5 mins.

9 1/8" x 7" STAND-ALONE UNIT
COMPLETE WITH

★ 1K x 8 NMOS STATIC RAM

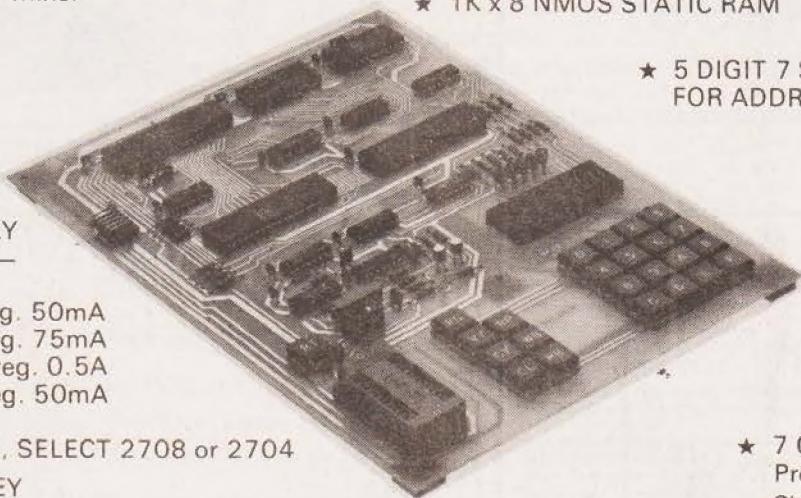

★ POWER SUPPLY
CONNECTOR —
requires
30V unreg. 50mA
12V reg. 75mA
5V reg. 0.5A
—5V reg. 50mA

★ SLIDE SWITCH, SELECT 2708 or 2704

★ RESET KEY

★ ZERO INSERTION FORCE SOCKET TO HOLD EPROM

★ 5 DIGIT 7 SEGMENT DISPLAY
FOR ADDRESS AND DATA


★ HEXADECIMAL
KEYPAD FOR
DATA ENTRY

★ 7 CONTROL KEYS —
Program, Verify, Copy,
Clear, Write Buffer,
Read Prom, Read Buffer

COMPLETE UNIT
ASSEMBLED & TESTED
AS ILLUSTRATED £130
Prices include postage, packing & VAT

OPTIONAL
POWER SUPPLY
UNIT £25

WARD-JANES ELECTRONICS LTD.
THE GREEN, WELLINGBOROUGH RD.
RUSHDEN, NORTHANTS
Telephone: Rushden (09334) 59263

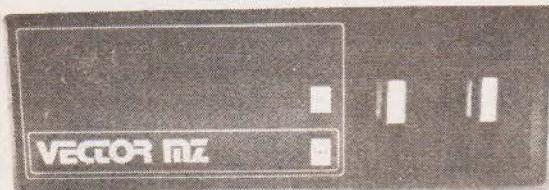

**THE TOTAL SOLUTION FROM
ALMARC
OF COURSE!**

Now Almarc & Vector Graphic offer the complete solution to your computing needs for £2300.00*. The Vector MZ needs only the addition of a V.D.U. and it's ready to go. Completely assembled and fully tested, the Vector MZ offers the following features as standard:

- S-100 bus
- 4 MHz Z80A processor
- 158 instructions
- Two quad density Micropolis floppies — over 630k bytes on line
- Serial port
- Two parallel ports
- 32K static ram
- 12K prom ram board with extended monitor
- Extended disc Basic

Simply connect your peripherals (Elbit V.D.U.s & Centronics printers are available from Almarc) and you're up and running and, because the MZ uses the S-100 bus, you can plug in a massive range of add-on units.

STOP PRESS: CPM now available for NZ

Ring or write for a demonstration to: —

ALMARC DATA SYSTEMS LTD.

29 Chesterfield Drive
Burton Joyce, Nottingham
Tel: 0602 248565

*Discount terms available



TARGET ELECTRONICS
FORMERLY "THE RADIO SHOP"

Telephone:
0272-421196

Official orders welcomed. Gvt. / Educational Deps. etc.

Size 60 mm x 45mm x 40mm

T21	0-50μA	T30	0-1Amp
T22	0-100μA	T33	0-50V AC
T23	0-500μA	T34	0-300c AC
T24	0-1mA	T35	"S" Meter
T25	0-5mA	T36	Vu Meter
T26	0-10mA	T40	50-0-50μA
T27	0-50mA	T41	100-0-100μA
T28	0-100mA	T42	500-0-500μA
T29	0-50mA	T43	0-30V DC

Price £5.10 P&P 25p

Size 110mm x 82mm x 43mm

043 0-30μA 0420 0-200μA

045 0-50μA 0450 0-500μA

0410 0-100μA 0410 0-100μA

Price £5.90
10 or more 10% Discount. P&P 50p

TRANSISTOR SPEAKERS

64SS	2 1/2	64ohms
3W80	2 1/2	Bohms
1W2	2 1/2	Bohms
5012	2	Bohms
4512	1 1/4	Bohms
3812	1 1/2	Bohms

10 or more 10% Discount. P&P 25p

DESOUDING TOOLS



High suction pump with automatic ejection
Knurled, anti-corrosive casing. Teflon
nozzle.

NASCOM 1 Z80 MICROCOMPUTER KIT

Includes interface for: TV or Monitor — cassette, dump —
Teletype — spare, PIO, Expansion RAM-BOARD up to 32K.

Potential: High Level Language, Mini Floppy Disk. Excellent
Z80 evaluation kit. £197.50 + VAT

● Please add 12 1/2% VAT. Remainder 8% VAT
Large selection of aluminium boxes & Instrument Cases.
Phone in your Access or Barclaycard order. Catalogue 25p post paid.



VISA